

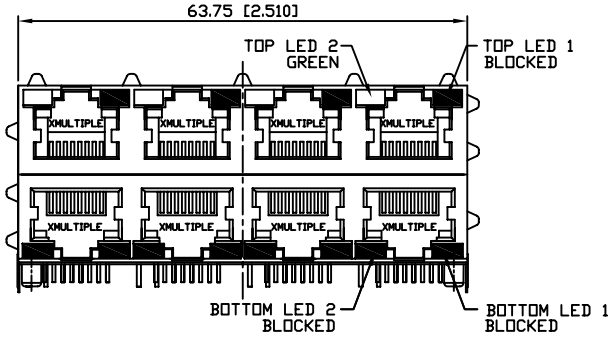

FRONT VIEW

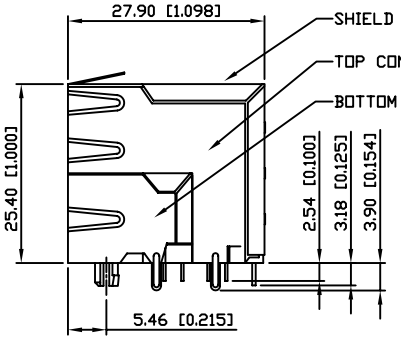

SIDE VIEW



LED SCHEMATIC

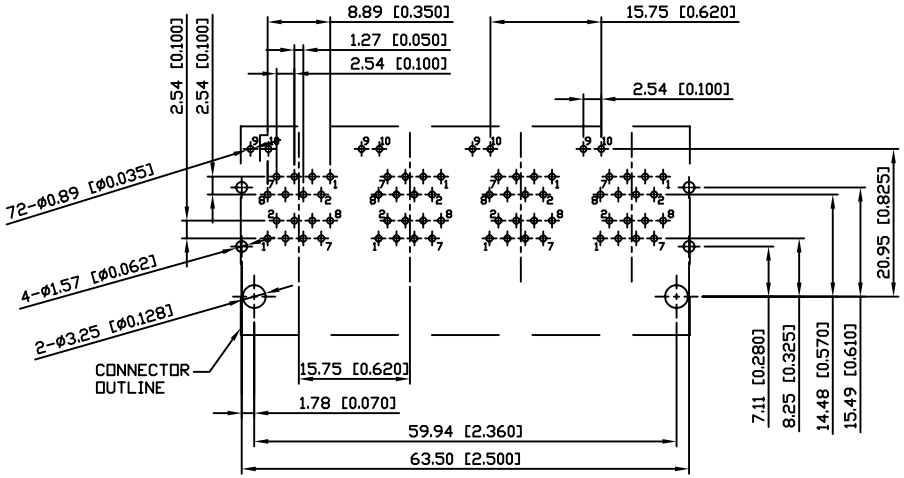

SUGGESTED PCB LAYOUT
TOP VIEW
DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]

NOTES:

1. MATERIALS:
   HOUSING: HIGH TEMP. THERMOPLASTIC, PBT, UL 94V-0, BLACK.
   CONTACTS: T=0.35 mm PHOSPHOR BRONZE, NICKEL UNDERPLATE
   ON ALL AREA, TIN ON TERMINATION END,
   HARD GOLD ON CONTACT AREA.
   SHIELD: T=0.25 mm COPPER ZINC ALLOY WITH NICKEL.
2. OPERATING TEMPERATURE: -40°C ~ +85°C
3. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F
4. UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
   .X ±0.30[0.012]

XRJD-S-24-8-8-3-DV1-DGR

- PRODUCT SERIES: D - STACKED
- SHIELDED TYPE: S : SHIELDED
- NO. OF PORTS
- NO. OF POSITION
- NO. OF CONTACT
- LED COLOR OPTION
- D : WITH SPRING ON LEFT, TOP & RIGHT
- V : W / LED ON TOP ONLY
- CONTACT GOLD PLATING OPTION
- CUSTOMER CODE

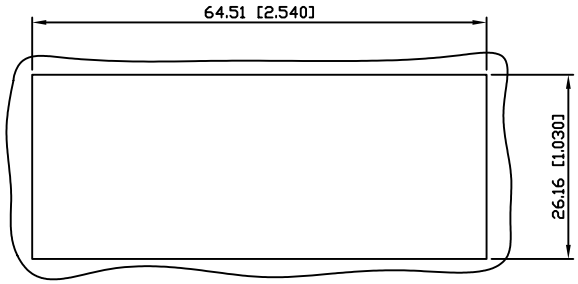

RECOMMENDED
PANEL CUTOUT DIMENSION

RoHS Compliant

XMULTIPLE — THE INFORMATION AGE

XMULTIPLE ASIA 4F, No. 347,Yang Guang St., Neihu , Taipei , Taiwan 11475	XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065
G/NO:	
THIS DRAWING IS A CONTROLLED DOCUMENT.	DWG NO: XRJD-S-24-8-8-3-DV1-DGR
TITLE: Stacked RJ45 Connectors, W/LED, 8P,8C, Shielded, Thru Hole, 2 Piece Structure	DRAWN: IVAN
PART NO: XRJD-S-24-8-8-3-DV1-DGR	CHKD: TARA
UNIT: mm[inch] / SHEET: 1 of 1 / REV: 01	DATE: Jun.25,09