REV.	ECN.NO.	NAME	DATE
A	NEW	KEN	2010/09/09



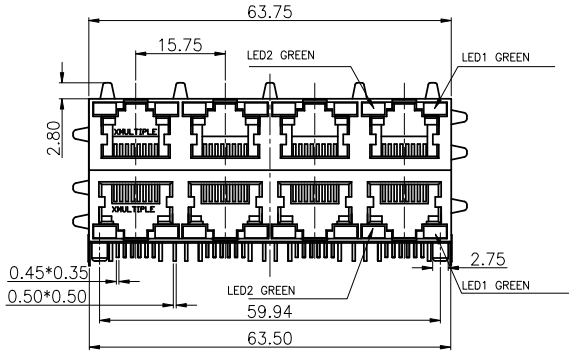

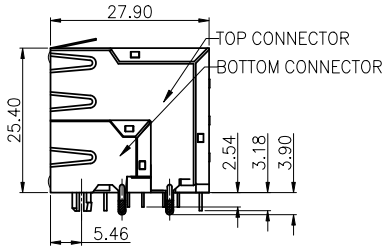

ROHS

XRJD-S-24-8-8-5

- PRODUCT SERIES D-STACKED
- SHIELDED TYPE S:SHIELDED
- NO. OF PORTS
- NO.OF POSITION
- NO.OF CONTACT
- LED COLOR OPTION

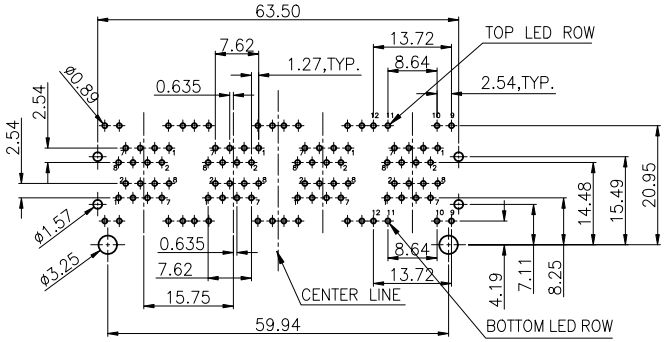

SUGGESTED PCB LAYOUT



LED SCHEMATIC

NOTES:

1.MATERIAL:
HOUSING:HIGH TEMP.THERMOPLASTIC,BLACK,PBT UL 94V-0
CONTACT:PHOSPHOR BORNZE,T=0.35MM.
SHELL:BRASS,T=0.25MM.

2.FINISH:
CONTACT:50u"MIN. NICKEL UNDERPLATING ALL AREA,
100u"MIN. TIN ON SOLDERTAILS,
15u"MIN. GOLD PLATING ON CONTACT AREA.
SHELL:30u"MIN. NICKEL UNDERPLATING ALL AREA
SHELL: T=0.25mm COPPER ZINC ALLOY PLATED WITH NICKEL
MYLAR:T=0.05mm PASTE THE MYLAR STICKER BETWEEN LED PINS AND SHIELD

3.OPERATING TEMPERTURE:-40°C~+85°C.

4.JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F

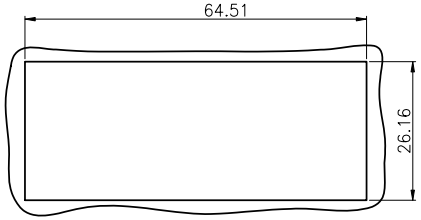

RECOMMENDED
PANEL CUTOUT DIMENSION

TOLERANCE UNSPECIFIED	
.	±0.5
.0	±0.38
.00	±0.25
.000	±0.10
ANGLE	±3°
MANUFACTURING COPY	

XMULTIPLE — CONNECTING THE INFORMATION AGE

TITLE: RJ45 Connectors, W/LED, 8P, 8C, Shielded/Thru Hole

DRAWN BY:	KEN	SIZE: A4	UNIT: mm	PART NO: XRJD-S-24-8-8-5	
CHECKED BY:	CP	SCALE:1:1		PROJECTION	REV: A
APPROVED BY:	CP	DWG . PATH			SHEET:1OF1