



**RECOMMENDED PANEL CUTOUT DIMENSION**

△ DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]

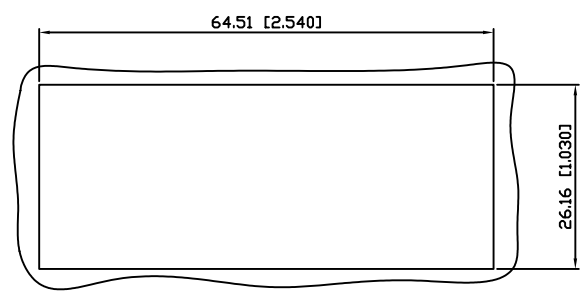

**NOTES:**

- MATERIALS:**  
 HOUSING: HIGH TEMP. THERMOPLASTIC, PBT, UL 94V-0, BLACK.  
 CONTACTS: T=0.35 mm PHOSPHOR BRONZE, 50µ" NICKEL UNDERPLATE  
 ON ALL AREA, 100µ" TIN ON TERMINATION END,  
 3µ" GOLD ON CONTACT AREA.  
 SHIELD: T=0.25 mm COPPER ZINC ALLOY WITH NICKEL.
- OPERATING TEMPERATURE:** -40°C ~ +85°C
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F**
- UNSPECIFIED TOLERANCE:** .XX ±0.25[0.010]  
 .X ±0.30[0.012]

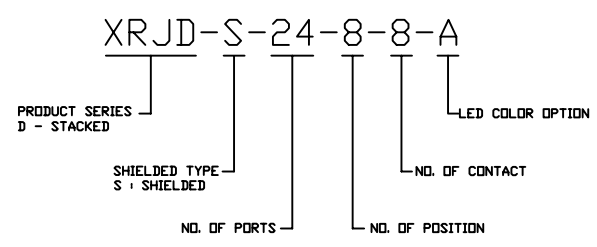

**RoHS Compliant**

<b>X MULTIPLE</b>		THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu Chiu, Taipei, Taiwan 11475		XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT.		G/NO: DWG NO: XRJD-S-24-8-8-A	
TITLE: Stacked RJ45 Connectors, w/LED, 8P,8C, Shielded, Thru Hole, 2 Piece Structure		DRAWN: RUNES	
PART NO: XRJD-S-24-8-8-A		CHKD: JEFF	
		UNIT mm[inch]	SHEET 1 of 1
		REV B	DATE: Jan.15,07