




FRONT VIEW

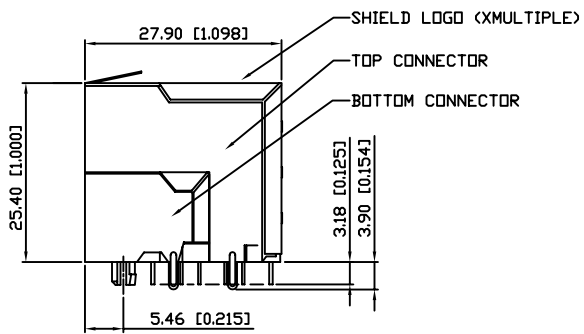


SIDE VIEW

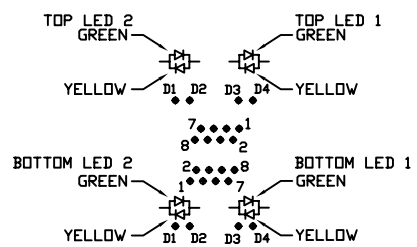

LED SCHEMATIC

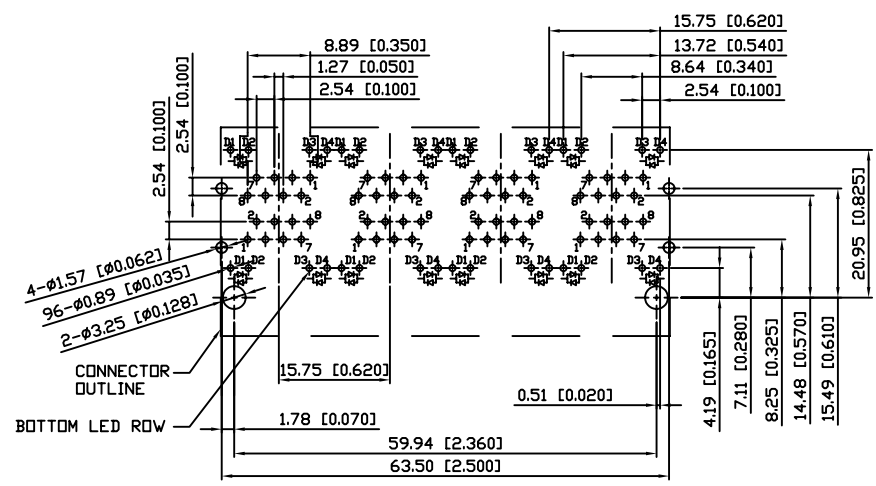


SUGGESTED PCB LAYOUT
TOP VIEW
DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]

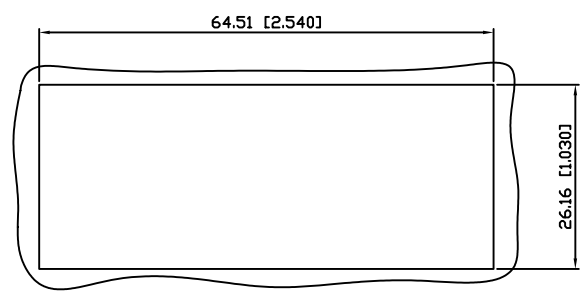

RECOMMENDED
PANEL CUTOUT DIMENSION

NOTES:

- MATERIALS:
HOUSING: HIGH TEMP. THERMOPLASTIC, PBT, UL 94V-0, BLACK.
CONTACTS: T=0.35 mm PHOSPHOR BRONZE, 50µ" NICKEL UNDERPLATE
ON ALL AREA, 100µ" TIN ON TERMINATION END,
15µ" GOLD ON CONTACT AREA.
SHIELD: T=0.25 mm COPPER ZINC ALLOY WITH NICKEL.
- OPERATING TEMPERATURE: -40°C ~ +85°C
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F
- UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

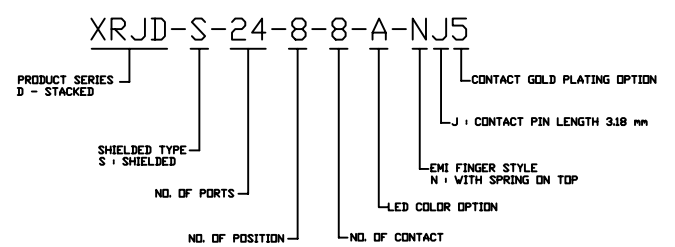

RoHS Compliant

X MULTIPLE		THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu, Taipei, Taiwan 11475		XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT.		G/NO: DWG NO: XRJD-S-24-8-8-A-NJ5	
TITLE: Stacked RJ45 Connectors, w/LED, 8P,8C, Shielded, Thru Hole, 2 Piece Structure		DRAWN: LEON	
PART NO: XRJD-S-24-8-8-A-NJ5		CHKD: JEFF	
		UNIT mm[inch]	SHEET 1 of 1
		REV A	DATE: Apr.02,07