

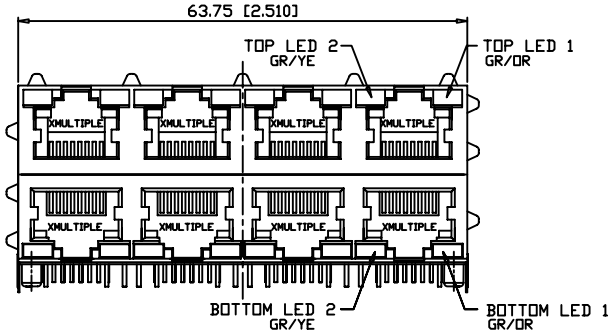

FRONT VIEW

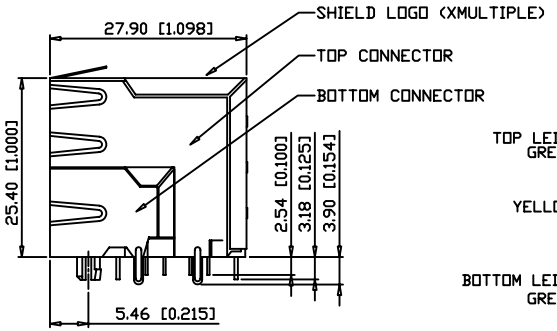

SIDE VIEW

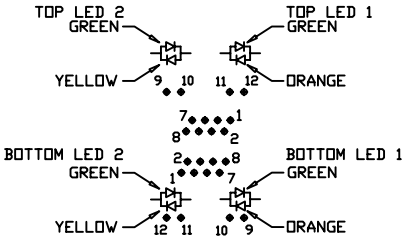

LED SCHEMATIC

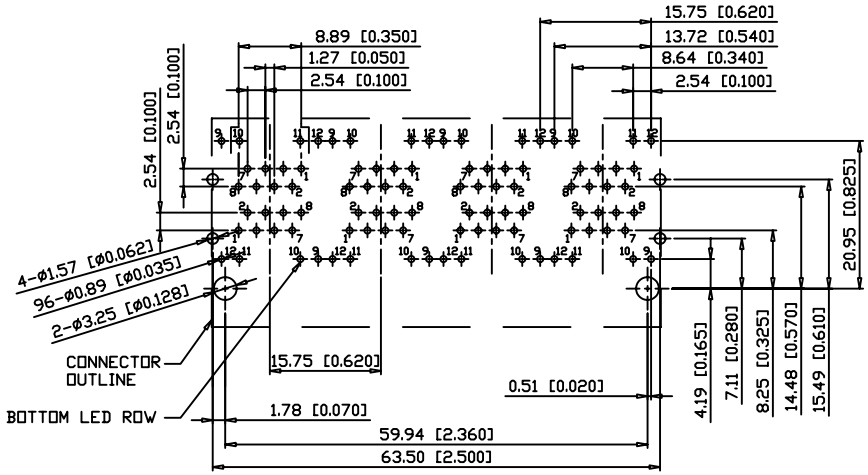

SUGGESTED PCB LAYOUT
TOP VIEW
DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]

NOTES:

1. MATERIALS:
   HOUSING: HIGH TEMP. THERMOPLASTIC, PBT, UL 94V-0, BLACK.
   CONTACTS: T=0.35 mm PHOSPHOR BORNZE, 50u' NICKEL UNDERPLATE
   ON ALL AREA, 100u' TIN ON TERMINATION END,
   15u' GOLD ON CONTACT AREA.
   SHIELD: T=0.25 mm COPPER ZINC ALLOY WITH NICKEL.
2. OPERATING TEMPERATURE: -40°C ~ +85°C
3. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F
4. UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
   .X ±0.30[0.012]

XRJD-S-24-8-8-W32-MHF

- PRODUCT SERIES: D - STACKED
- SHIELDED TYPE: S : SHIELDED
- NO. OF PORTS
- NO. OF POSITION
- NO. OF CONTACT
- LED COLOR OPTION
- CUSTOMER CODE

RoHS Compliant

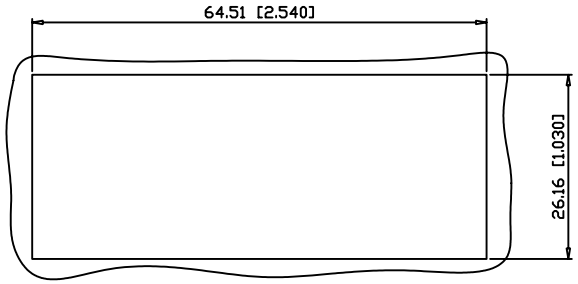

RECOMMENDED
PANEL CUTOUT DIMENSION

XMULTIPLE — THE INFORMATION AGE

XMULTIPLE ASIA
4F, No. 347,Yang Guang St.,
Neihu , Taipei , Taiwan 11475

XMULTIPLE USA
1420 Los Angeles Ave., Suite G,
Simi Valley, CA 93065

THIS DRAWING IS A CONTROLLED DOCUMENT.

TITLE: Stacked RJ45 Connectors, W/LED, 8P,8C, Shielded, Thru Hole, 2 Piece Structure

PART NO: XRJD-S-24-8-8-W32-MHF

UNIT	SHEET	REV
mm[inch]	1 of 1	01

G/NO:
DWG NO: XRJD-S-24-8-8-W32-MHF
DRAWN: IVAN
CHKD: TARA
DATE: Feb.17,09