



- NOTES:
- MATERIAL:  
HOUSING: DSM STANYL TE250F6 (NYLON-46)  
HEAT DEFLECTION TEMP. 290°  
BLACK COLOR, UL94V-0  
CONTACTS: 0.35mm THICK PHOS-BRONZE PLATED WITH 15u" GOLD AND GOLD FLASH IN SOLDER AREA.
  - OPERATING TEMPERATURE: -40°C ~ +85°C
  - CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.
  - UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]  
.X ±0.30[0.012]

RECOMMENDED PANEL CUTOUT DIMENSION

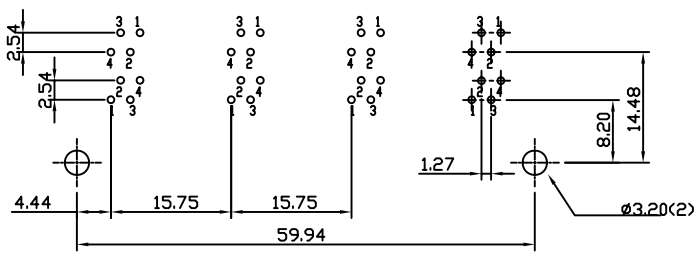

SUGGESTED PCB LAYOUT (TOP VIEW)  
DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]



DETAIL X

# RoHS Compliant

<b>X MULTIPLE</b>		CONNECTING THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu, Taipei, Taiwan 11475		XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT.		G/NO: 9766	
TITLE: Stacked RJ11 Connectors, 2*4, W/O LED, 6P,4C, Unshielded, Thru Hole.		DWG NO: XRJD-U-24-6-4-0-911	
PART NO: XRJD-U-24-6-4-0-911		DRAWN: TOM	
		CHKD: JEFF	
UNIT: mm [Inch]		SHEET: 1 of 1	
REV: 01		DATE: Sep, 06, 07	