


NOTES:

- MATERIALS:
HOUSING: PBT POLYESTER, UL 94V-0 MIXED GLASS FIBER, STANDARD COLOR-BLACK
CONTACTS: T=0.35 mm THICK PHOS-BRONZE PLATED WITH 6µ" GOLD AND GOLD FLASH IN SOLDER AREA.
- OPERATING TEMPERATURE: -40°C ~ +85°C
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F
- UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

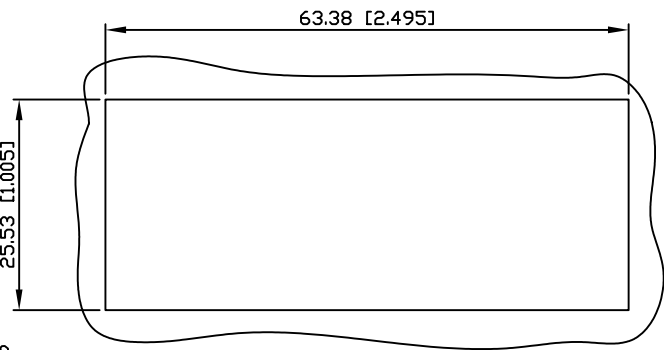


RECOMMENDED
PANEL CUTOUT DIMENSION

SUGGESTED PCB LAYOUT
TOP VIEW
DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]

RoHS Compliant

XRJD-U-24-6-6-0-9I4-EC

PRODUCT SERIES STACKED
SHIELDED TYPE U UNSHIELDED
NO. OF PORTS
NO. OF POSITION
LED COLOR OPTION
NO. OF CONTACT
CONTACT GOLD PLATING OPTION
SERIAL NUMBER
RUNNING CODE
CUSTOMER CODE



<p>X MULTIPLE</p> <p><small>MULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu, Taipei, Taiwan 11475</small></p>		<p><small>MULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065</small></p>		<p>G/NO: 9733</p>
		<p>THIS DRAWING IS A CONTROLLED DOCUMENT.</p>		
<p>TITLE: Stacked RJ11 Connectors, W/o LED, 6P,6C, Unshielded, Thru Hole</p>				
<p>PART NO: XRJD-U-24-6-6-0-9I4-EC</p>		<p>DRAWN: IVAN</p>		
<p>UNIT: mm[inch]</p>		<p>CHKD: TARA</p>		
<p>SHEET: 1 of 1</p>		<p>DATE: Jul.22,08</p>		
<p>REV: 01</p>				