




MULTIPLE

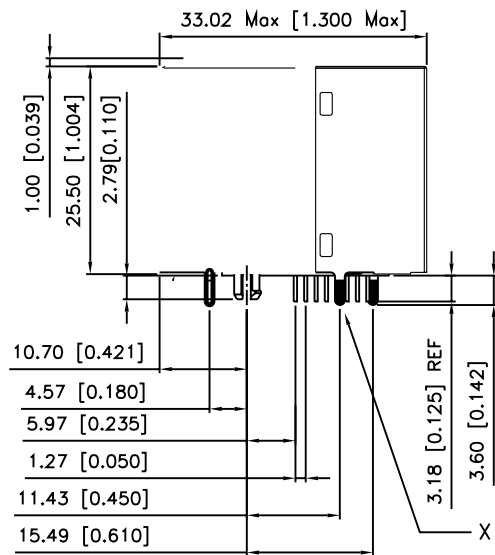

2. OPERATING TEMPERATURE: 0°C~+70°C




2. PCB LAYOUT :

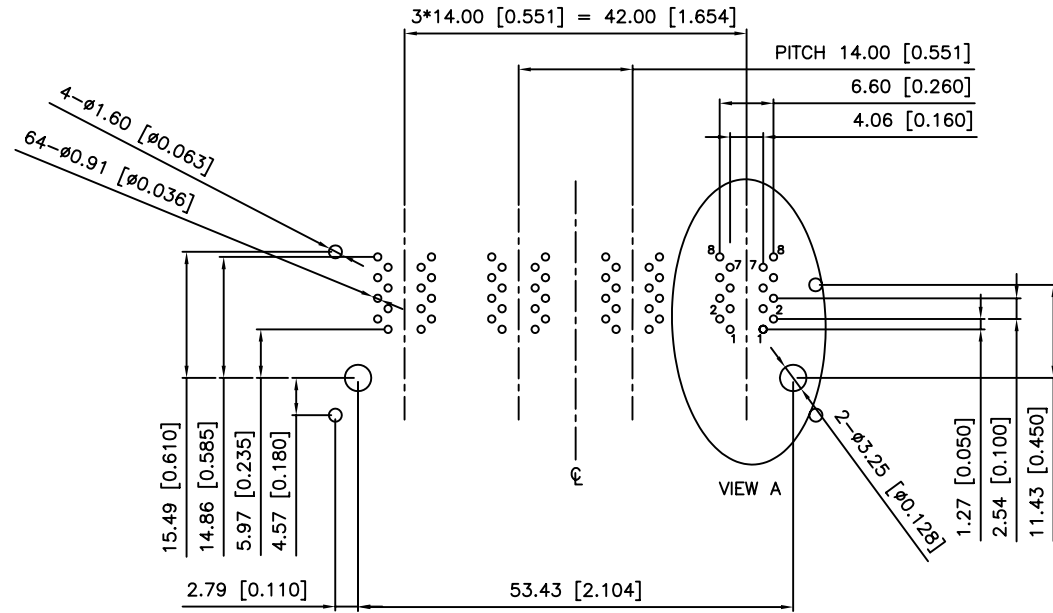

SUGGESTED PCB LAYOUT  
TOP VIEW



DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]

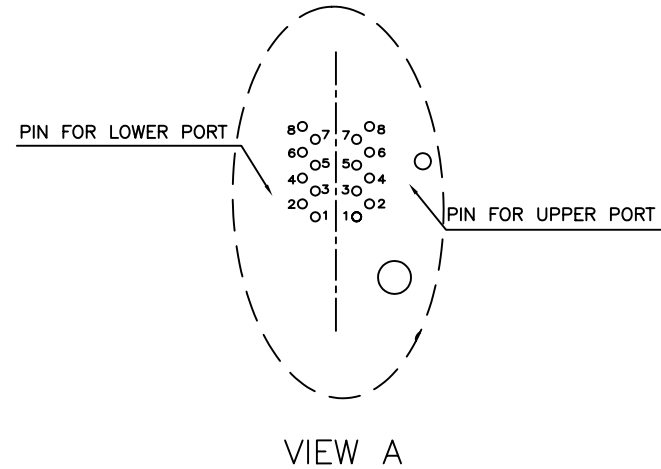



RoHS Compliant

<b>XMULTIPLE</b>		CONNECTING THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu, Taipei, Taiwan 11475		XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT.		G/NO:	
TITLE: Stacked RJ45, W/O LED, W/O T/F, 8P,8C, Shielded, Thru Hole.		DWG NO: XRJH-24D-0-000-070-ID	
PART NO: XRJH-24D-0-000-070-ID		DRAWN: RUNES	
		CHKD: TARA	
		DATE: Apr.24.08	
UNIT mm[inch]	SHEET 2 of 3	REV 01	

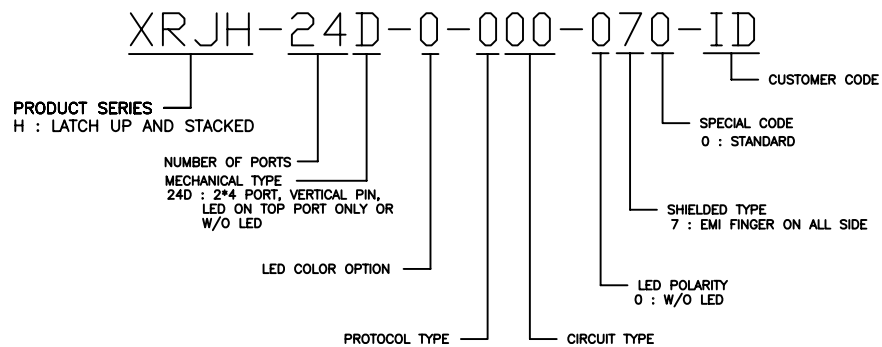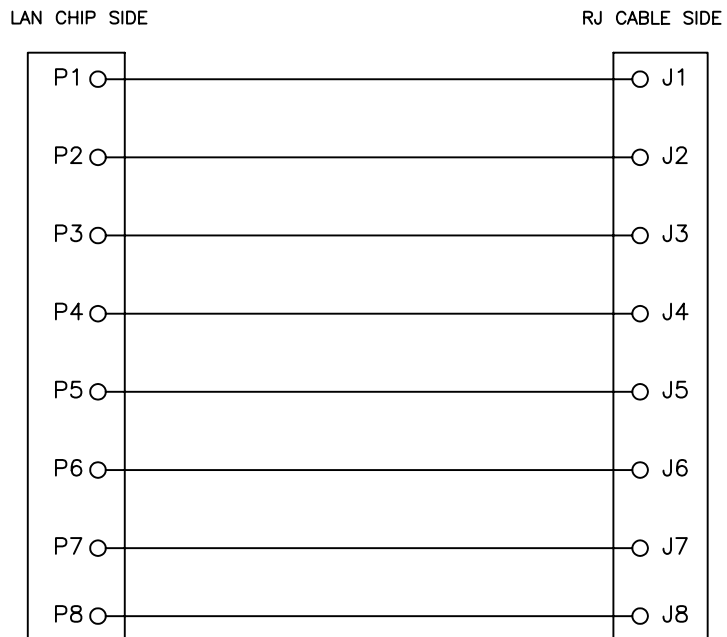4. SCHEMATIC:



RoHS Compliant

<b>X</b> MULTIPLE		CONNECTING THE INFORMATION AGE	
<small>XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu, Taipei, Taiwan 11475</small>		<small>XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065</small>	
THIS DRAWING IS A CONTROLLED DOCUMENT.		G/NO:	
TITLE: Stacked RJ45, W/O LED, W/O T/F, 8P,8C, Shielded, Thru Hole.		DWG NO: XRJH-24D-0-000-070-ID	
PART NO: XRJH-24D-0-000-070-ID		DRAWN: RUNES	
 		UNIT	SHEET
		mm[inch ]	3 of 3
		REV	DATE:
		01	Apr.24.08