
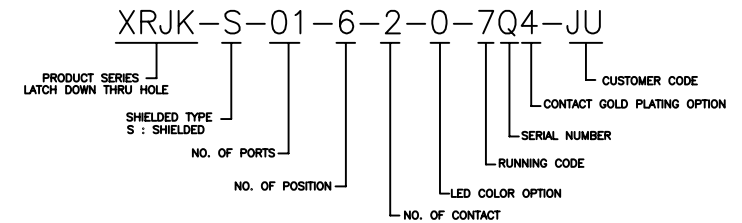
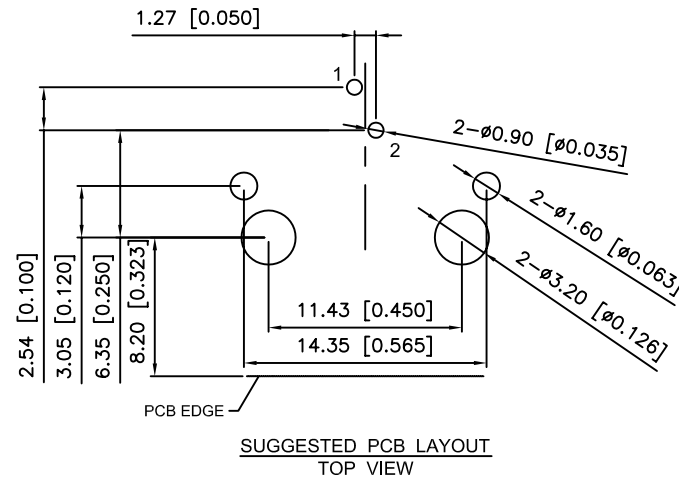


NOTES:

1. MATERIAL
HOUSING: PBT WITH GLASS FIBER UL94V-0
STANDARD COLOR-BLACK
CONTACTS: DIA 0.45mm PHOSPHOR BRONZE
6u" GOLD PLATING OVER NICKEL
SHIELD: COPPER ALLOY, PLATED WITH NICKEL
2. OPERATING TEMPERATURE: -40°C ~ +85°C
3. CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.
4. UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

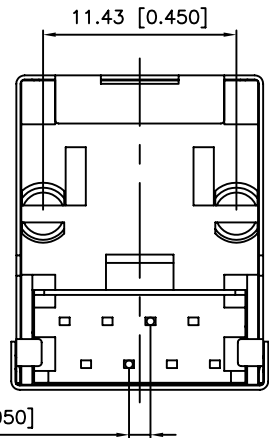

RoHS Compliant

XMULTIPLE		THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu, Taipei, Taiwan 11475		XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT.		G/NO: 83	
TITLE: RJ11 Connectors, 6P,2C, Shielded, Thru-Hole		DWG NO: XRJK-S-01-6-2-0-7Q4-JU	
PART NO: XRJK-S-01-6-2-0-7Q4-JU		DRAWN: LEON	
		CHKD: JEFF	
UNIT: mm[inch]		SHEET: 1 of 1	
REV: 01		DATE: Feb.01,08	