



NOTES:

1. MATERIAL
HOUSING: PBT POLYESTER UL94V-0
MIXED GLASS FIBER,
STANDARD COLOR-BLACK
CONTACTS: 0.35mm THICKNESS PHOSPHOR BRONZE
PLATED WITH 30μ" GOLD AND TIN IN SOLDER AREA
SHIELD: COPPER ALLOY, PLATED WITH NICKEL.
2. OPERATING TEMPERATURE: -40°C ~ +85°C
3. CAVITY CONFORMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.
4. UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

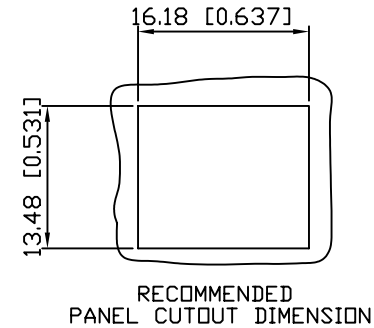

SUGGESTED PCB LAYOUT
TOP VIEW
DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]

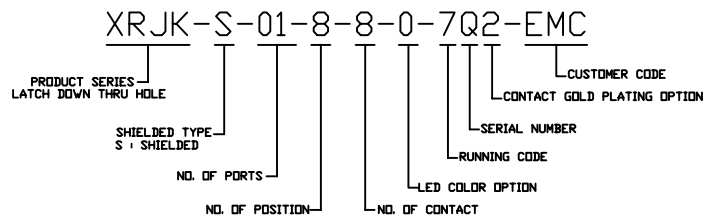

RoHS Compliant

| | | | |
|---|--|---|--|
| X MULTIPLE | | THE INFORMATION AGE | |
| XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu, Taipei, Taiwan 11475 | | XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065 | |
| G/NO: 83 | | DWG NO: XRJK-S-01-8-8-0-7Q2-EMC | |
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | | |
| TITLE: RJ45 Connectors, 8P,8C, Shielded, Thru-Hole | | DRAWN: RUNES | |
| PART NO: XRJK-S-01-8-8-0-7Q2-EMC | | CHKD: JEFF | |
| UNIT: mm[inch] | | SHEET: 1 of 1 REV: 01 DATE: Mar.31,08 | |