


SUGGESTED PCB LAYOUT
(TOP VIEW)

DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]

RoHS Compliant

NOTES:

- MATERIALS:
HOUSING-PBT POLYESTER UL94V-0
MIXED GLASS FIBER.
STANDARD COLOR-BLACK.
CONTACTS-0.46mm DIA. PHOS-BRONZE PLATED
WITH 6u' GOLD
SHIELD-0.25mm THICK COPPER ALLOY,
PLATED WITH NICKEL.
- OPERATING TEMPERATURE: -40°C ~ +85°C
- CAVITY CONFORMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.
- UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

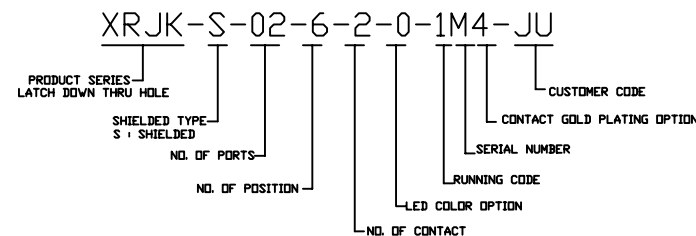

X MULTIPLE

THE INFORMATION AGE

X MULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu, Taipei, Taiwan 11475		X MULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065		G/NO: DWG NO: DRAWN: CHKD: DATE:	
THIS DRAWING IS A CONTROLLED DOCUMENT.					
TITLE: RJ11 Connectors, w/D LED, 6P,2C, Shielded, Thru-Hole					
PART NO: XRJK-S-02-6-2-0-1M4-JU					
		SHEET 1 of 1		REV 01	
		DATE: Nov.28,07		LEON JEFF	