


RECOMMENDED  
PANEL CUTOUT DIMENSION

NOTES:

- MATERIAL  
HOUSING-PBT POLYESTER UL94V-0  
MIXED GLASS FIBER,  
STANDARD COLOR-BLACK  
CONTACTS-0.35mm PHOSPHOR BRONZE PLATED  
WITH 50u" GOLD.  
SHIELD-0.25mm THICK COPPER ALLOY,  
PLATED WITH NICKEL.
- OPERATING TEMPERATURE: -40°C ~ +85°C
- CAVITY CONFORMS TO FCC RULES AND REGULATIONS  
PART 68,SUBPART F.
- UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]  
.X ±0.30[0.012]

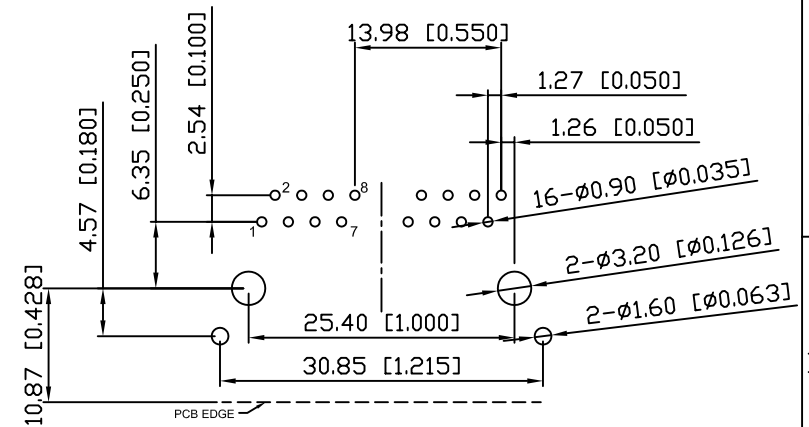

SUGGESTED PCB LAYOUT  
TOP VIEW  
DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]

RoHS Compliant

XRJK-S-02-8-8-0-3R3-EJF

PRODUCT SERIES LATCH DOWN THRU HOLE  
SHIELDED TYPE S: SHIELDED  
NO. OF PORTS  
NO. OF POSITION  
NO. OF CONTACT  
SERIAL NUMBER  
RUNNING CODE  
LED COLOR OPTION  
CONTACT GOLD PLATING OPTION  
CUSTOMER CODE

|  |        |  |                                |                         |
|--|--------|--|--------------------------------|-------------------------|
| X MULTIPLE   |        |  | CONNECTING THE INFORMATION AGE |                         |
| X MULTIPLE ASIA<br>4F, No. 347, Yang Guang St.,<br>Neihu, Taipei, Taiwan 11475 |        | X MULTIPLE USA<br>1420 Los Angeles Ave., Suite G,<br>Simi Valley, CA 93065 |                                | 82                      |
| THIS DRAWING IS A CONTROLLED DOCUMENT.   |        |  |                                | DWG NO:                 |
| TITLE: RJ45 Connectors, 8P,8C, Shielded, Thru-Hole                             |        |  |                                | XRJK-S-02-8-8-0-3R3-EJF |
| PART NO: XRJK-S-02-8-8-0-3R3-EJF   |        |  |                                | DRAWN: LEON             |
|  |        |  |                                | CHKD: JEFF              |
| UNIT   | SHEET  | REV  | DATE: Mar.03,08                |                         |
| mm[Inch]   | 1 of 1 | 01   |                                |                         |