




NOTES:

- MATERIALS:  
HOUSING: HIGH TEMP. THERMOPLASTIC, PBT, BLACK, UL 94V-0  
CONTACTS: T=0.35 mm PHOSPHOR BORNZE, 50u" NICKEL UNDERPLATE ON ALL AREA, 100u" TIN ON TERMINATION END, 15u" GOLD ON CONTACT AREA.  
SHIELD: BRASS, NICKEL PLATED .
- OPERATING TEMPERATURE: -40°C ~ +85°C
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F
- UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]  
.X ±0.30[0.012]

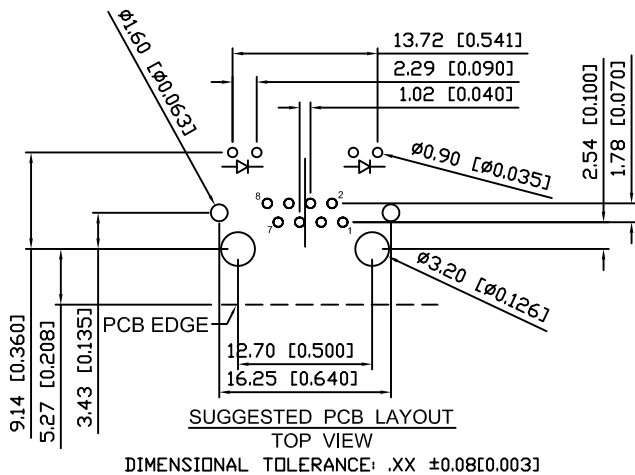

RECOMMENDED  
PANEL CUTOUT DIMENSION

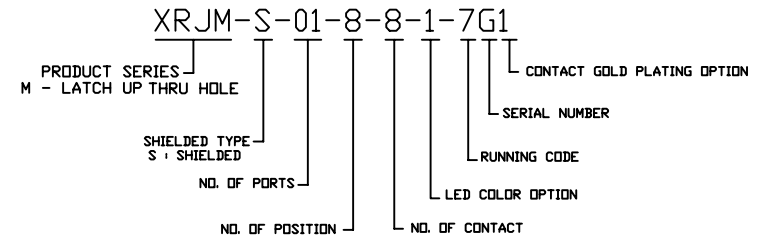

RoHS Compliant

<b>X MULTIPLE</b>		THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu, Taipei, Taiwan 11475		XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT.		G/NO: 81	
TITLE: RJ45 Connectors, W/LED, 8P,8C, Shielded, Thru-Hole,		DWG NO: XRJM-S-01-8-8-1-7G1	
PART NO: XRJM-S-01-8-8-1-7G1		DRAWN: LEON	
		CHKD: JEFF	
		DATE: Jun.13,07	
UNIT mm[inch]	SHEET 1 of 1	REV 01	