

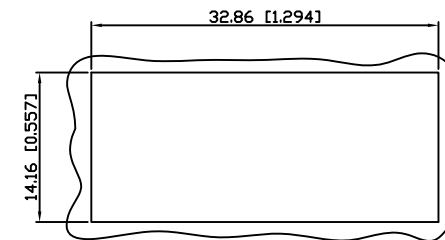


NOTES:

- MATERIALS:  
HOUSING: HIGH TEMP. THERMOPLASTIC, PBT, BLACK, UL 94V-0  
CONTACTS: T=0.35 mm PHOSPHOR BORNZE, 50u" NICKEL UNDERPLATE ON ALL AREA, 100u" TIN ON TERMINATION END, 15u" GOLD ON CONTACT AREA.  
SHIELD: BRASS, NICKEL PLATING
- OPERATING TEMPERATURE: -40°C ~ +85°C
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F
- UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]  
.X ±0.30[0.012]

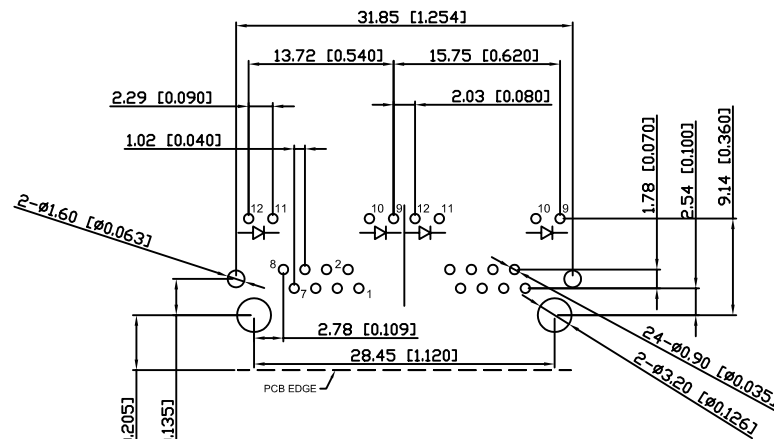

RECOMMENDED  
PANEL CUTOUT DIMENSION

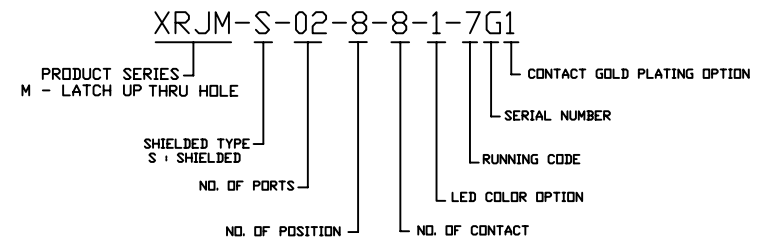

SUGGESTED PCB LAYOUT  
TOP VIEW  
DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]

RoHS Compliant

<b>X</b> MULTIPLE		THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu, Taipei, Taiwan 11475		XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT.			
TITLE:		RJ45 Connectors, W/LED, 8P,8C, Shielded, Thru-Hole, G/ND: DWG NO: XRJM-S-02-8-8-1-7G1	
PART NO:		DRAWN: IVAN CHKD: JEFF	
		UNIT	DATE:
mm[inch]		SHEET	REV
		1 of 1	01
		Jun.14,07	