


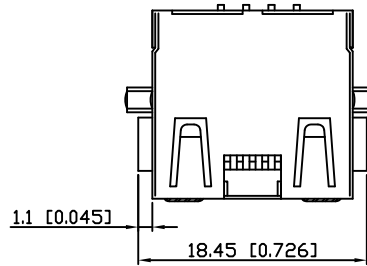



RECOMMENDED
PANEL CUTOUT DIMENSION

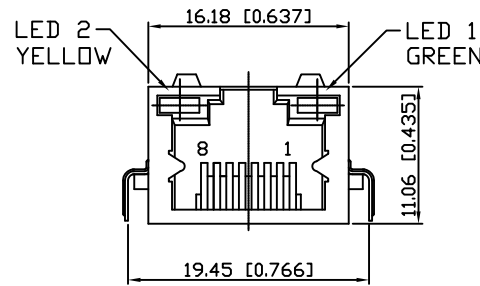

LED SCHEMATIC

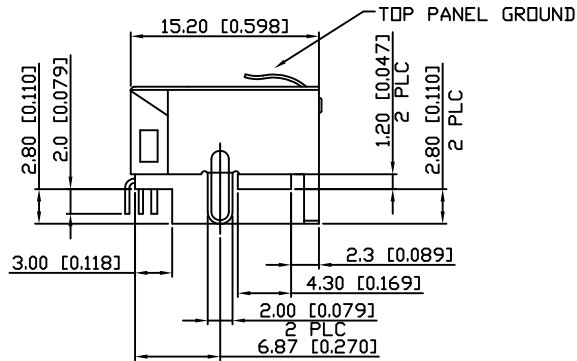


XRJM-S-01-8-8-1-9J4

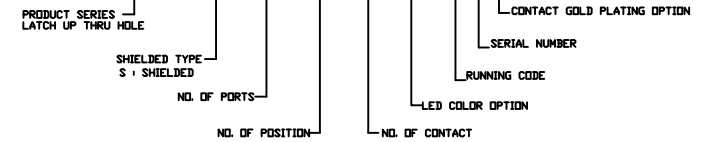


NOTES:

- MATERIAL:
HOUSING: DSM STANYL TE250F6 (NYLON-46)
BLACK COLOR, UL94V-0
CONTACTS: 0.35mm THICK PHOS-BRONZE PLATED
WITH 6u" GOLD AND GOLD FLASH IN
SOLDER AREA.
SHIELD: 0.25mm THICK COPPER ALLOY,
PLATED WITH NICKEL.
- OPERATING TEMPERATURE: -40°C~+85°C
- CAVITY CONFORMS TO FCC RULES AND REGULATIONS
PART 68, SUBPART F.
- UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

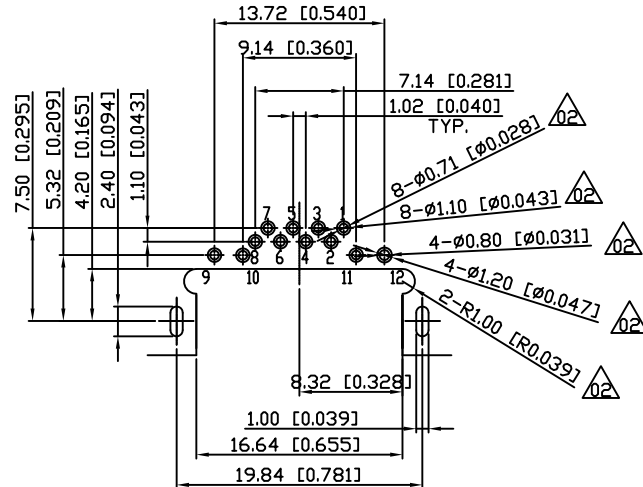

SUGGESTED PCB LAYOUT
TOP VIEW
DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]

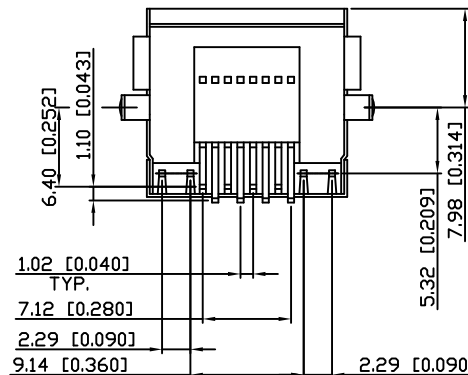

RoHS Compliant

X MULTIPLE		THE INFORMATION AGE	
MULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu, Taipei, Taiwan 11475		MULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065	
G/NO:		9798	
THIS DRAWING IS A CONTROLLED DOCUMENT.			
DWG NO:		XRJM-S-01-8-8-1-9J4	
TITLE: RJ45 Connectors, w/LED, 8P,8C, Shielded, Thru-Hole			
DRAWN:			
TQM			
PART NO:		XRJM-S-01-8-8-1-9J4	
CHKD:			
TARA			
DATE:		Apr 14, 09	
UNIT		SHEET	
mm[inch]		1 of 1	
REV		02	