


SUGGESTED PCB LAYOUT
TOP VIEW
DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]

NOTES:

- MATERIALS:**
HOUSING-DSM STANYL TE250F6 (NYLON-46)
HEAT DEFLECTION TEMP.290°
BLACK COLOR, UL 94V-0
TERMINAL-0.35mm THICK PHOS-BRONZE
PLATED WITH 15u" GOLD AND
TIN IN SOLDER AREA.
HOLD DOWN-0.35mm THICK COPPER ALLOY,
PLATED WITH TIN.
- OPERATING TEMPERATURE** -40°C ~ +85°C
- CAVITY CONFIRMS TO FCC RULES AND REGULATIONS**
PART 68,SUBPART F.
- UNSPECIFIED TOLERANCE:** .XX ±0.25[0.010]
.X ±0.30[0.012]

NOTE:

- A AND B HIGHEST POINT**
MUST OVER C FLAT SURFACE.
- THE MAXIMUM DISTANCE (0.15m/m)**
BETWEEN LOWEST AND HIGHEST
ON A AND B FLAT SURFACE.

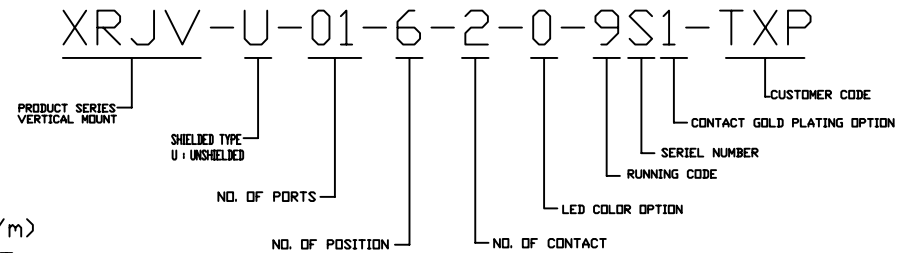

RoHS Compliant

X MULTIPLE		THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu, Taipei, Taiwan 11475		XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT.		G/NO:	
TITLE: RJ11 Jack, W/o LED, 6P, 2C, Unshielded, Vertical Mount, SMT		DWG NO: XRJV-U-01-6-2-0-9S1-TXP	
PART NO: XRJV-U-01-6-2-0-9S1-TXP		DRAWN: IVAN	
		CHKD: JEFF	
		DATE: Jan.21,08	
UNIT mm[inch]	SHEET 1 of 1	REV 01	