




RECOMMENDED
PANEL CUTOUT DIMENSION

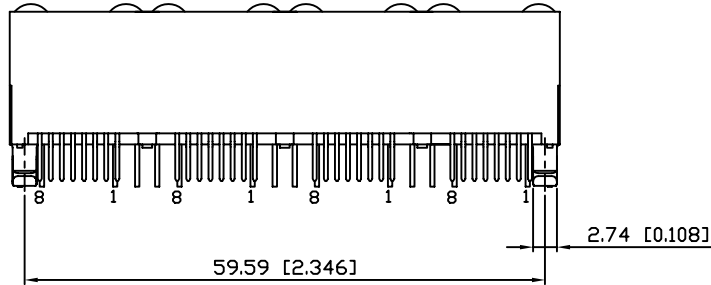


NOTES:

- MATERIAL:
HOUSING-DSM STANYL TE250F6 (NYLON-46)
HEAT DEFLECTION TEMP.290°
BLACK COLOR, UL94V-0
CONTACTS-0.35mm THICK PHOS-BRONZE PLATED
WITH 6u" GOLD AND GOLD FLASH IN
SOLDER AREA.
- OPERATING TEMPERATURE: -40°C ~ +85°C
- CAVITY CONFORMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.
- UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]



XRJV-U-04-8-8-4-9U4

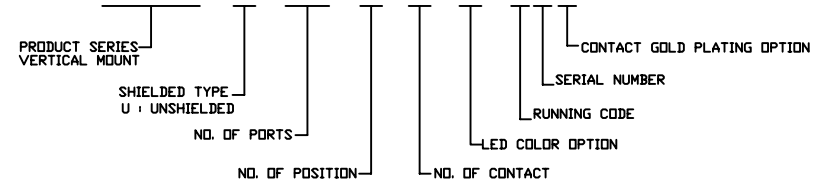

RoHS Compliant

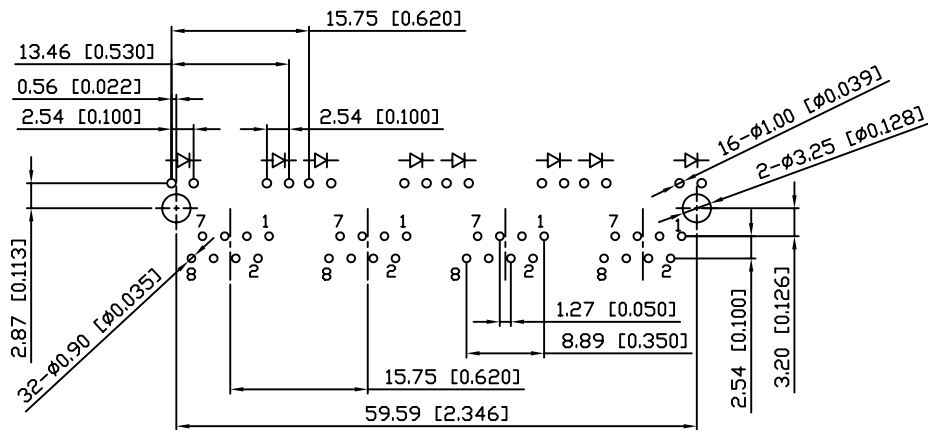

SUGGESTED PCB LAYOUT
TOP VIEW
DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]

X MULTIPLE		THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu Chiu, Taipei, Taiwan 11475		XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT.		G/NO:	9774
TITLE: RJ45 JACK, W/LED, 8P, 8C, UNSHIELDED, VERTICAL MOUNT, THRU-HOLE		DWG NO:	XRJV-U-04-8-8-4-9U1
PART NO: XRJV-U-04-8-8-4-9U1		DRAWN:	RUNES
 		CHKD:	JEFF
UNIT	SHEET	REV	DATE:
mm[inch]	1 of 1	01	Nov.21,06