



REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

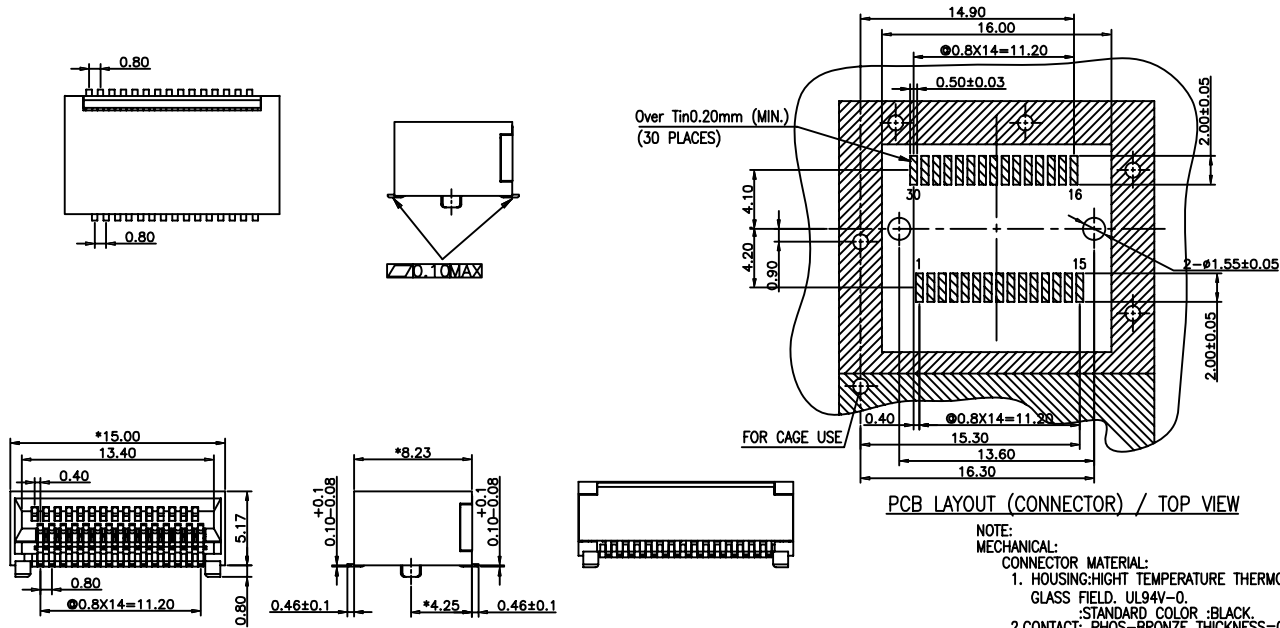

PCB LAYOUT (CONNECTOR) / TOP VIEW

NOTE:
 MECHANICAL:
 CONNECTOR MATERIAL:
 1. HOUSING: HIGH TEMPERATURE THERMOPLASTIC GLASS FIBER, UL94V-0, STANDARD COLOR -BLACK.
 2. CONTACT: PHOS-BRONZE THICKNESS=0.20mm.
 3. DURABILITY: 250 CYCLES MIN.
 ELECTRICAL:
 1. VOLTAGE RATING : 30 VAC RMS MAX.
 2. CURRENT RATING : 0.5 AMP MAX.
 3. DIFFERENTIAL IMPEDANCE : 100 Ohms.
 4. CAPACITANCE: 1.2pF MAX.
 5. CONTACT RESISTANCE: 20 MILLIOHMS MAX.
 6. INSULATION RESISTANCE: 500 MEGAOHMS MIN.
 7. TEMPERATURE:
 OPERATING: -55°C to +85°C
 STORAGE: -55°C to +85°C
 IR REFLOW SOLDER TEMPERATURE SUGGEST 250°C~270°C.
 PART NUMBER : XFP-002X-L
 GOLD PLATED:
 1-3u" 2-6u" 3-15u"
 4-30u" 5-50u"

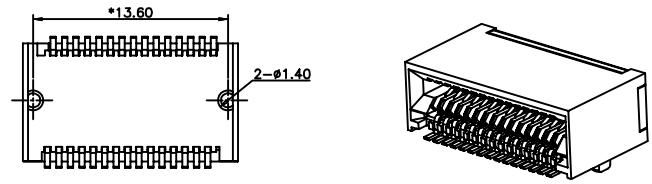

DETACHED LISTS MM (INCH) TOLERANCES EXCEPT AS NOTED .0 ±0.20 ± .00 ±0.15 ± .000 ±0.075 ± ANGLES ± THIRD ANGLE PROJECTION	DFTO JERRY	DATE 05/15/07	Xmultiple Technologies Inc. TITLE XFP CONNECTOR 30P		
	CHKD ANDY	DATE 05/16/07			
	MFO	DATE	DRAWING NO. XFP-002	SIZE A3	REV O
	APPVL ALANN	DATE 05/18/07	/PART NO. SEE NOTE		
	MATERIAL :	QTY :	DO NOT SCALE DRAWING		
	FINISH :	SCALE :	SHEET X	OF Y	