


Specifications:  
 Current Rating:1.0A AC/DC  
 Voltage Rating:30V AC/DC  
 Contact Resistance:20m ohm. Max.  
 Insulation Resistance:1000M ohm. Min.  
 Withstanding Voltage:500V AC/Minute  
 Operating Temperature Range:-40°C ~ +105°C  
 Material and Finish  
 Insulator:High Temp. Plastic (UL94V-0)  
 Contact:Phosphor Bronze  
 Finish:Tin Plated


Pos	A	B	C	Pos	A	B	C
4	7.00	3.81	5.60	16	22.24	19.05	20.84
6	9.54	6.35	8.14	18	24.78	21.59	23.38
8	12.08	8.89	10.68	20	27.32	24.13	25.92
10	14.62	11.43	13.22	22	29.86	26.67	28.46
12	17.16	13.97	15.76	24	32.40	29.21	31.00
14	19.70	16.51	18.30	26	34.94	31.75	33.54

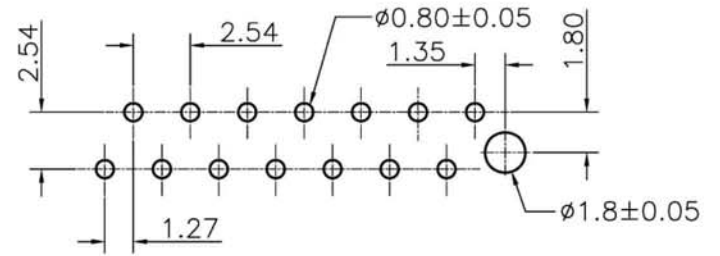

PCB Layout

UNLESS OTHERWISE SPECIFIED TOLERANCE  
 .0 ±0.2  
 .00 ±0.15

SIZE	DRAWN
A4	Sam
REV.	DATE
A	07/02/08



DESCRIPTION:  
 Micro Match PCB connector 180° type (RoHS)

PRODUCT NO.  
 XTB-MM03-16T3R-SE1  
 FILE NAME.

**XMULTIPLE**  
 Technologies, Inc.