
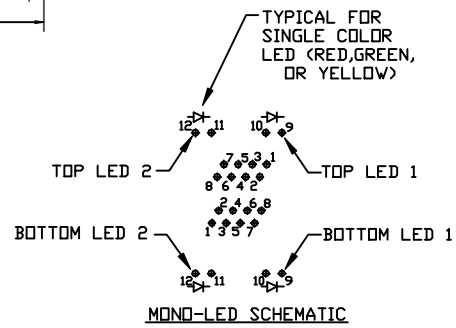
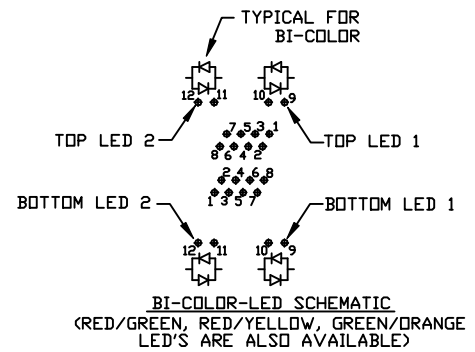
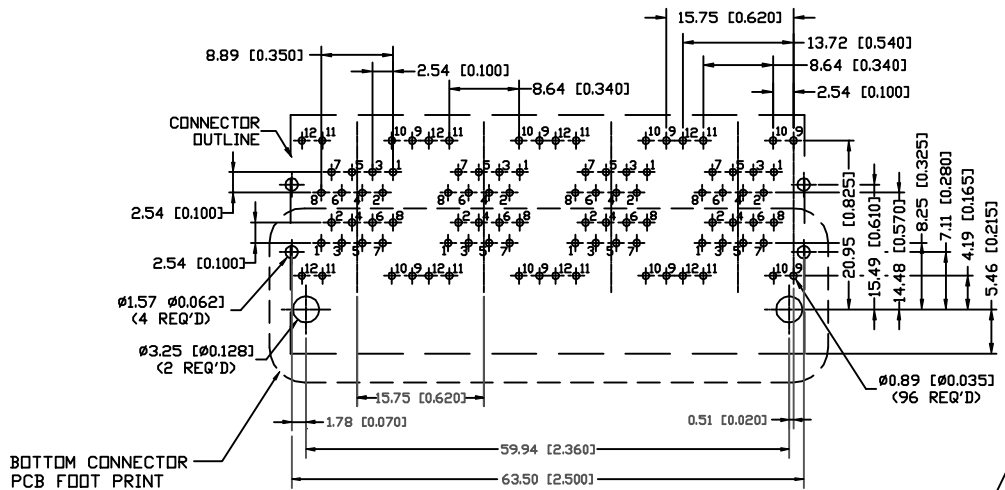


REVISIONS					
ECO	ZONE	REV	DESCRIPTION	DATE	APPROVED
		J1	REVISED RELEASE	07/31/01	Chen

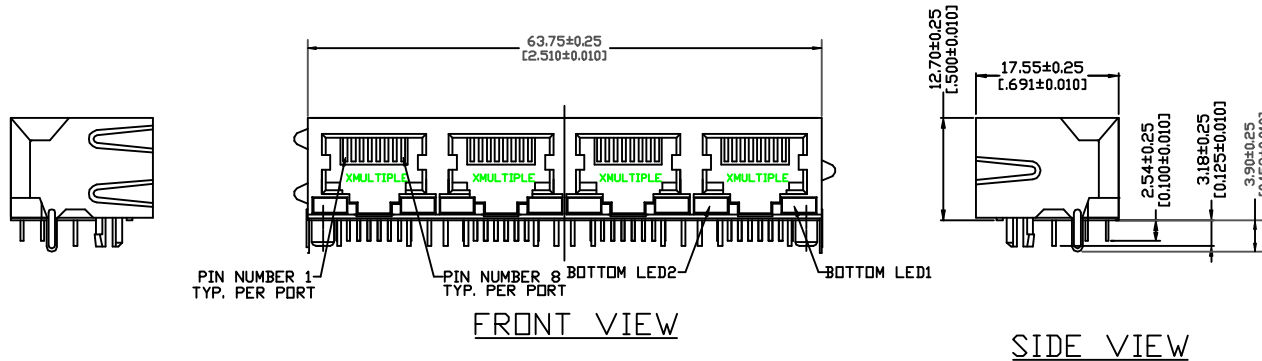

1. MATERIALS:  
HOUSING: HIGH TEMP. THERMOPLASTIC, BLACK, UL 94V-0  
CONTACTS: 0.014 INCHES (0.35 MILLIMETERS) THICK PHOSPHOR BRONZE PLATED WITH 150 MICRONS (3.81 MICROMETERS) MINIMUM THICK TIN LEAD IN SOLDER AREA. 15 MICRONS (0.38 MICROMETERS) MINIMUM GOLD IN LOCALIZED PLATE AREA. ENTIRE CONTACTS PLATED WITH 50 MICRONS (1.27 MICROMETERS) MINIMUM THICK NICKEL. SHIELDED: 0.0098 INCHES (0.25 MILLIMETERS) THICK COPPER ZINC ALLOY PLATED WITH 30 MICRONS (0.762 MICROMETERS) MINIMUM THICK NICKEL
2. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F
3. PART NUMBER XRJD-S-24-8-8-X  
REFER TO LED OPTIONS TABLE FOR ORDERING CODES

NOTES: UNLESS OTHERWISE SPECIFIED  
UNSPECIFIED TOLERANCE: .XX±0.010[0.25]  
.X±0.006[0.15]

<b>XMULTIPLE</b>		CONNECTING THE INFORMATION AGE	
XMULTIPLE ASIA 11F-Li, No. 70, Pui-Hing H. Road Tsimshai, Taiwan, R.O.C.		XMULTIPLE USA 848 Conantary Club Drive #B-108 Brea, Valley, CA 92606	
THIS DRAWING IS A CONTROLLED DOCUMENT. TITLE: Stacked RJ45 Connectors, w/LED, 8P, 8C, Shielded, Thru Hole, Bottom Place			
PART NO: XRJD-S-04-8-8-X		DRAWN: VIQ	
		DIMENSIONS: [mm] inch SHEET: 1 of 1 REV: J1 DATE: 09/10/02	