



LED SCHEMATIC



BI-COLOR LED DETAIL
(RED, RED/YELLOW, GREEN/ORANGE LED'S ARE ALSO AVAILABLE)

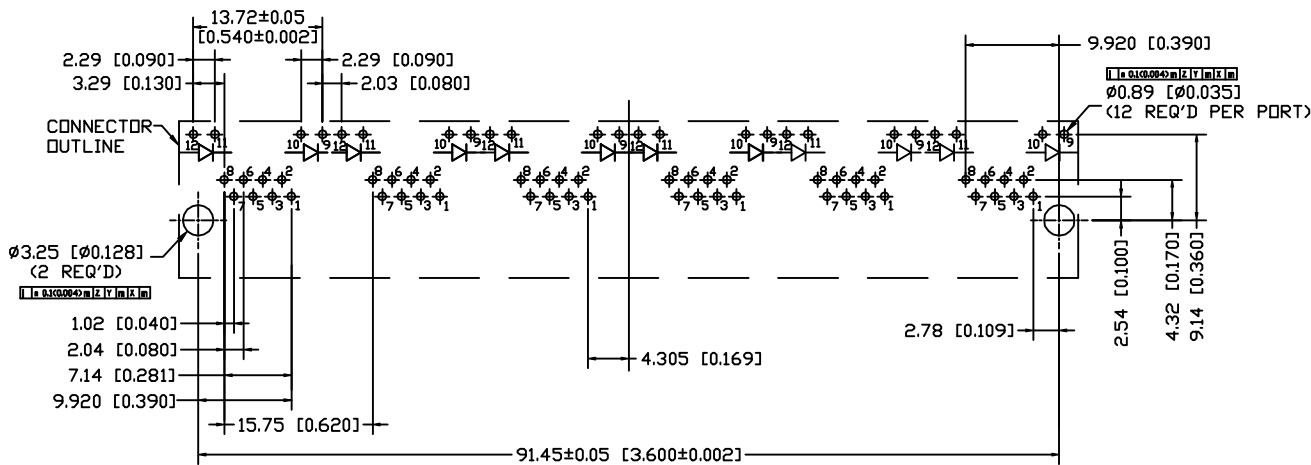

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

PCB LAYOUT
TOLERANCE
.XX±0.05[0.002]

- 1. MATERIALS:**
HOUSING: HIGH TEMP. THERMOPLASTIC, BLACK, UL 94V-0
CONTACTS: 0.014 INCHES (0.35 MILLIMETERS) THICK PHOSPHOR BRONZE PLATED WITH 150 MICROINCHES (3.81 MICROMETERS) MINIMUM THICK TIN LEAD IN SOLDER AREA.
15 MICROINCHES (0.38 MICROMETERS) MINIMUM GOLD IN LOCALIZED PLATE AREA.
ENTIRE CONTACTS PLATED WITH 50 MICROINCHES (1.27 MICROMETERS) MINIMUM THICK NICKEL.

- 2. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F**
3. PART NUMBER: XRJ-U-06-8-8-X-F1

REFER TO LED OPTIONS TABLE FOR ORDERING CODES

NOTES: UNLESS OTHERWISE SPECIFIED
UNSPECIFIED TOLERANCE: .XX±0.25[0.010]
.X±0.30[0.012]

XMULTIPLE		CONNECTING THE INFORMATION AGE	
XMULTIPLE ASIA 8F, No. 60, Hsuan St. Taipei, 104, Taiwan, R.O.C.		XMULTIPLE USA 8806 Old County Road Newbury Park, CA 91380	
THIS DRAWING IS A CONTROLLED DOCUMENT.		P/N:	
TITLE: R-45, Connectors, W/LED,8P,8C, Unshielded, Thru-Hole		DWG NO: PDU06-801	
PART NO: XRJM-U-06-8-8-X-F1		DRW: VIQ	
DATE:		CHK: C. TSAI	
REV: J		DATE: 10/06/01	
DIMENSIONS mm [Inch]		SHEET 1 of 1	