



LED SCHEMATIC



BI-COLOR LED DETAIL
(RED, RED/YELLOW, GREEN/ORANGE LED'S ARE ALSO AVAILABLE)

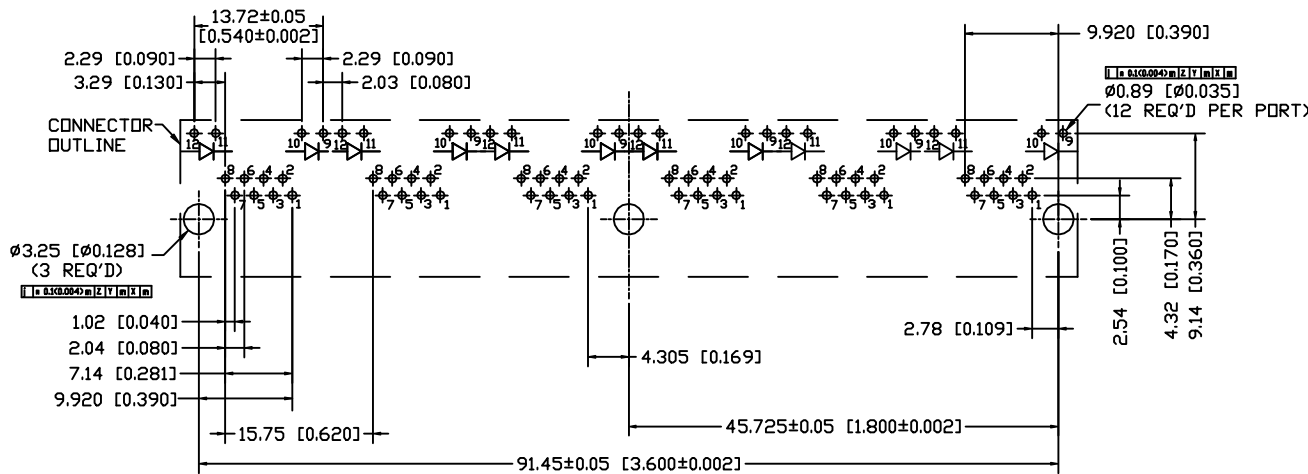

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

PCB LAYOUT
TOLERANCE
.XX±0.05[0.002]

1. MATERIALS:
HOUSING: HIGH TEMP. THERMOPLASTIC, BLACK, UL 94V-0
CONTACTS: 0.014 INCHES (0.35 MILLIMETERS) THICK PHOSPHOR BRONZE PLATED WITH 150 MICRONS (3.81 MICROMETERS) MINIMUM THICK TIN LEAD IN SOLDER AREA. 15 MICRONS (0.38 MICROMETERS) MINIMUM GOLD IN LOCALIZED PLATE AREA. ENTIRE CONTACTS PLATED WITH 50 MICRONS (1.27 MICROMETERS) MINIMUM THICK NICKEL.

2. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F
3. PART NUMBER: XRJ-U-06-8-8-X-F2

REFER TO LED OPTIONS TABLE FOR ORDERING CODES

NOTES: UNLESS OTHERWISE SPECIFIED
UNSPECIFIED TOLERANCE: .XX ± 0.25 [0.010]
.X ± 0.30 [0.012]

XMULTIPLE		CONNECTING THE INFORMATION AGE
<small>XMULTIPLE AREA 57, W. 90, Hudson St. Fairfield, IA, USA, 50501, U.S.A.</small>	<small>XMULTIPLE USA 5565 Old Cottage Road Newport News, VA, 23602</small>	<small>DRG NO: PDU06-801</small>
THIS DRAWING IS A CONTROLLED DOCUMENT.		
<small>TITLE: RJ45 Connectors, W/LED,SP,BC, Unshielded, Thru-Hole</small>	<small>PART NO: XRJM-U-06-8-8-X-F2</small>	<small>DRG DATE: 10/06/01</small>
<small>DIMENSIONS mm [inch]</small>	<small>SHEET 1 of 1</small>	<small>REV J</small>
		<small>DATE 10/06/01</small>