




FRONT VIEW

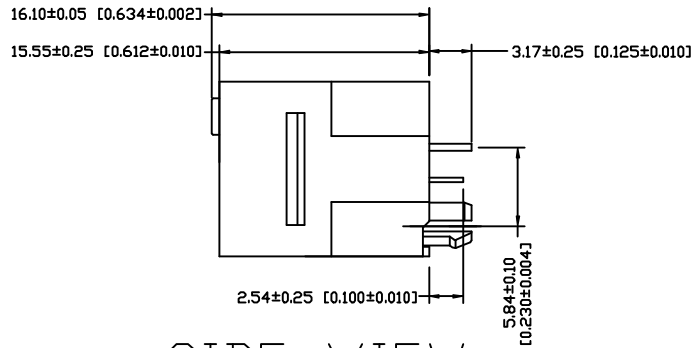


SIDE VIEW

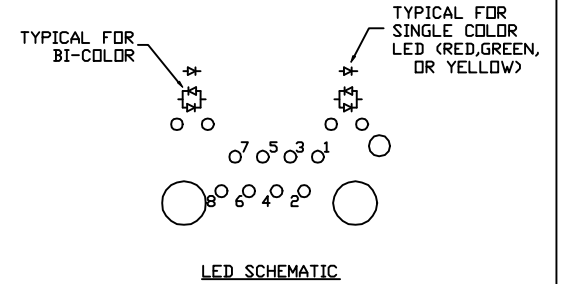

LED SCHEMATIC



BI-COLOR LED DETAIL  
(RED, RED/YELLOW, GREEN/ORANGE LED'S ARE ALSO AVAILABLE)

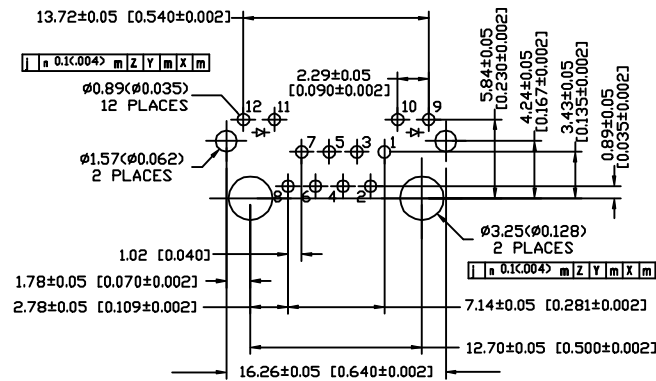

SUGGESTED PCB LAYOUT  
(COMPONENT SIDE)

- MATERIALS:  
HOUSING: HIGH TEMP. THERMOPLASTIC, BLACK, UL 94V-0  
CONTACTS: 0.014 INCHES (0.35 MILLIMETERS) THICK PHOSPHOR BRONZE PLATED WITH 150 MICROINCHES (3.81 MICROMETERS) MINIMUM THICK TIN LEAD IN SOLDER AREA. 15 MICROINCHES (0.38 MICROMETERS) MINIMUM GOLD IN LOCALIZED PLATE AREA. ENTIRE CONTACTS PLATED WITH 50 MICROINCHES (1.27 MICROMETERS) MINIMUM THICK NICKEL.
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F
- PART NUMBER: XRJV-U-01-8-8-X  
REFER TO LED OPTIONS TABLE FOR ORDERING CODES

NOTES: UNLESS OTHERWISE SPECIFIED  
UNSPECIFIED TOLERANCE: .XX ± 0.010 [0.25]  
.X ± 0.006 [0.15]

<b>XMULTIPLE</b>		CONNECTING THE INFORMATION AGE
XMULTIPLE ASIA 117-LING YU, P.O.-Hsing N. Road Taipei, Taiwan, R.O.C.	XMULTIPLE USA 8866 Old County Road Newbury Park, CA 91380	DWG NO: PDW0723
THIS DRAWING IS A CONTROLLED DOCUMENT.		
TITLE: RJ45 Jack w/LED, 8P, 8C, Unshielded, Vertical Mount, Thru-Hole		DRAWN: VIQ
PART NO: XRJV-U-01-8-8-X		CHKD: C. TSAI
	DIMENSIONS mm [inch]	SHEET 1 of 1
	REV J	DATE 07/24/01