

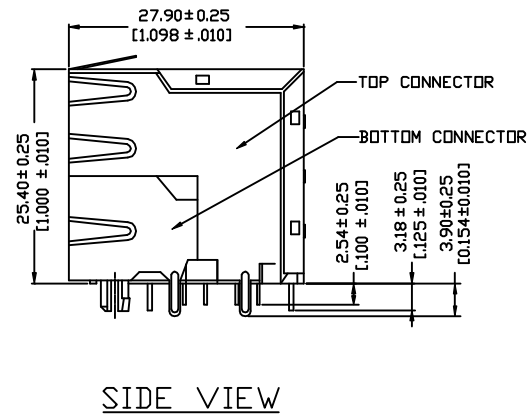


REVISIONS					
ECO	ZONE	REV	DESCRIPTION	DATE	APPROVED
		J1	REVISED RELEASE	07/31/01	Chen

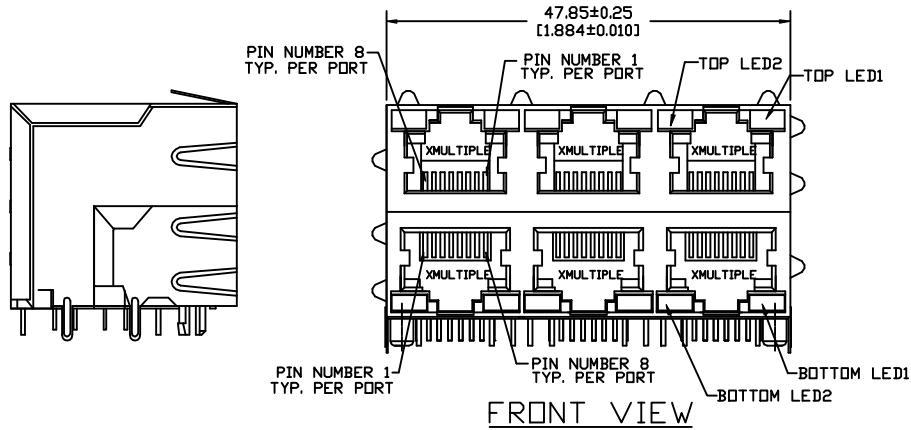


FRONT VIEW

SIDE VIEW

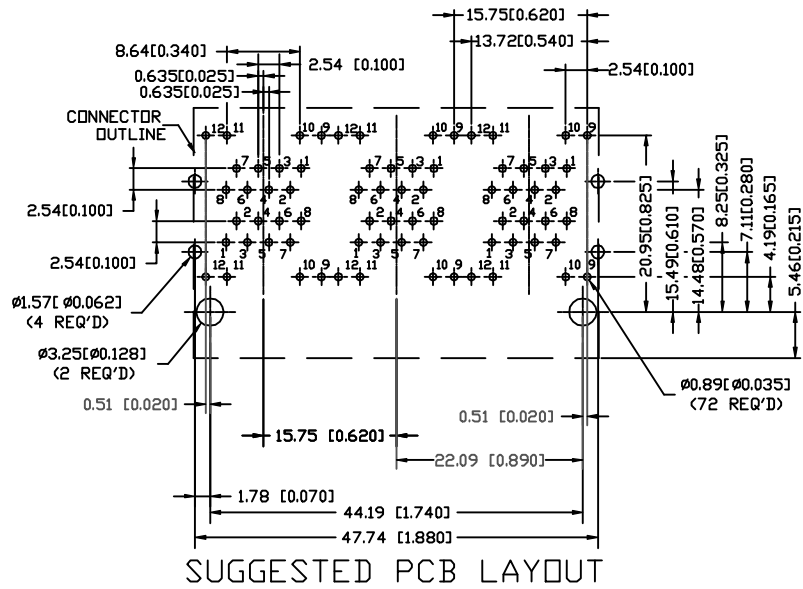


SUGGESTED PCB LAYOUT

(COMPONENT SIDE)

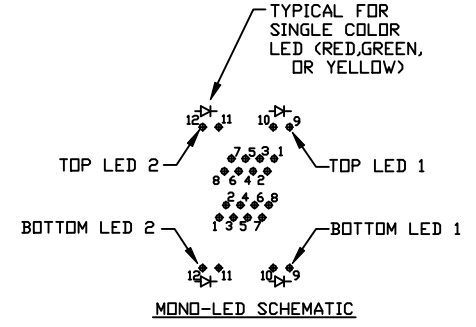

MONO-LED SCHEMATIC

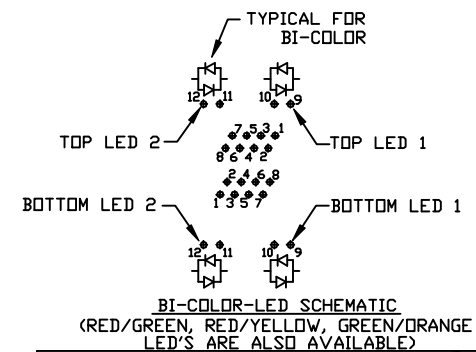

BI-COLOR-LED SCHEMATIC  
(RED/GREEN, RED/YELLOW, GREEN/ORANGE LED'S ARE ALSO AVAILABLE)

1. MATERIALS:  
HOUSING: HIGH TEMP. THERMOPLASTIC, BLACK, UL 94V-0  
CONTACTS: 0.014 INCHES (0.35 MILLIMETERS) THICK PHOSPHOR BRONZE PLATED WITH 150 MICRONS (3.81 MICROMETERS) MINIMUM THICK TIN LEAD IN SOLDER AREA. 15 MICRONS (0.38 MICROMETERS) MINIMUM GOLD IN LOCALIZED PLATE AREA. ENTIRE CONTACTS PLATED WITH 30 MICRONS (0.27 MICROMETERS) MINIMUM THICK NICKEL. SHIELDED: 0.0098 INCHES (0.25 MILLIMETERS) THICK COPPER ZINC ALLOY PLATED WITH 30 MICRONS (0.762 MICROMETERS) MINIMUM THICK NICKEL.

2. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F

3. PART NUMBER: XRJD-S-23-8-8-X

NOTES: UNLESS OTHERWISE SPECIFIED  
UNSPECIFIED TOLERANCE: .XX±0.010[0.25]  
.X±0.006[0.15]

REFER TO LED OPTIONS TABLE FOR ORDERING CODES

<b>XMULTIPLE</b>		CONNECTING THE INFORMATION AGE
<b>XMULTIPLE ASIA</b> 11F-14th Fl., Pei-Hsing N. Road Taipei, Taiwan R.O.C.	<b>XMULTIPLE USA</b> 3855 Old County Road Newbury Park, CA 91380	<b>ENG</b>
THIS DRAWING IS A CONTROLLED DOCUMENT.		
TITEL: Stacked RJ45 Connectors, V/LED, BP, BC, Shielded, Thru Hole, 2 Piece Structure		DRW NO: PDS24-TRD21
PART NO: XRJD-S-23-8-8-X		DRW: VIQ
	DIMENSIONS	SHEET
	[mm]inch	1 of 1
	REV	DATE
	J1	07/31/01