
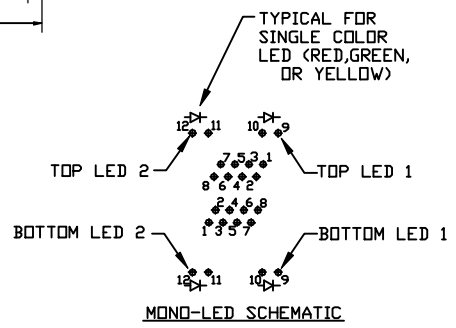
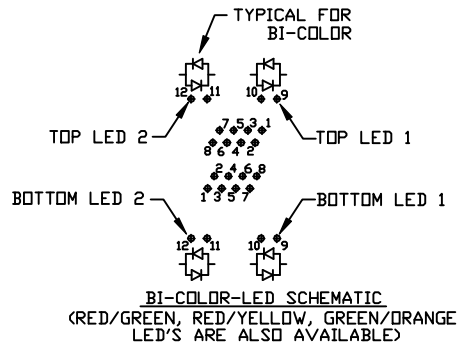
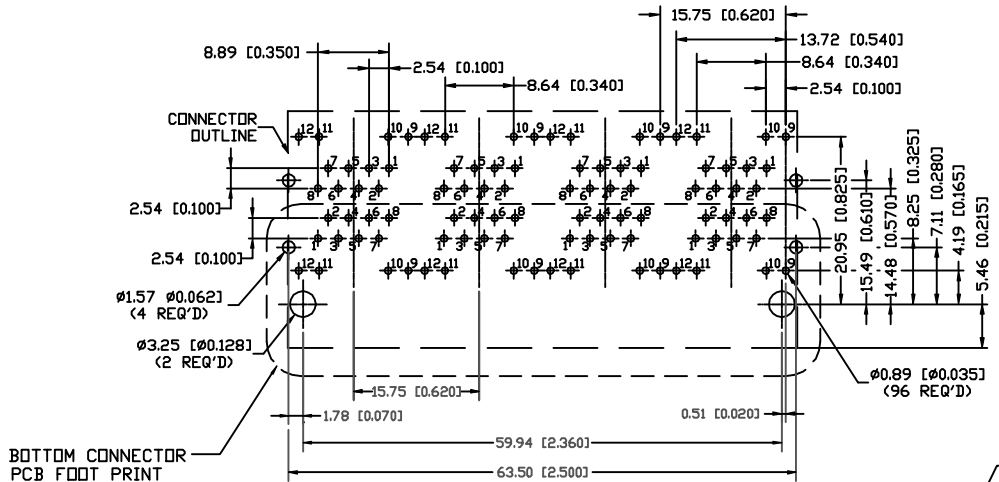


REVISIONS					
ECO	ZONE	REV	DESCRIPTION	DATE	APPROVED
		J1	REVISED RELEASE	07/31/01	Chen

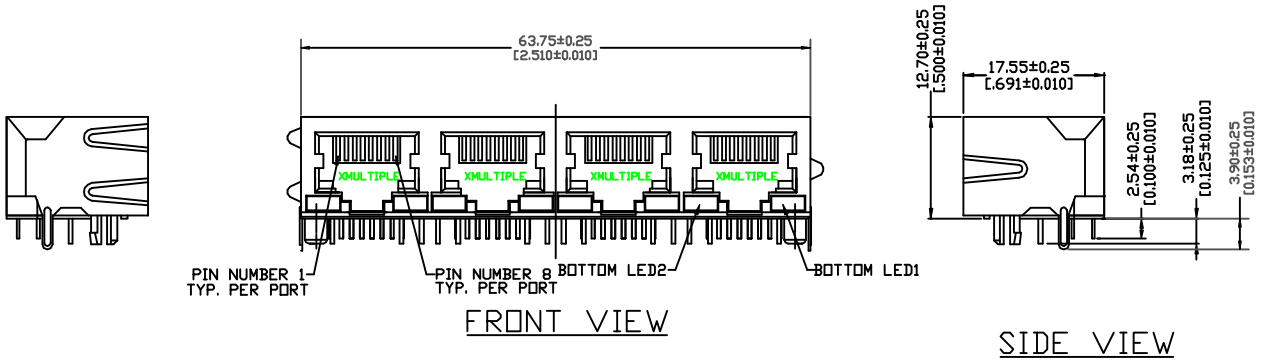

- MATERIALS:**
HOUSING: HIGH TEMP. THERMOPLASTIC, BLACK, UL 94V-0
CONTACTS: 0.014 INCHES (0.35 MILLIMETERS) THICK PHOSPHOR BRONZE PLATED WITH 150 MICRONS (3.81 MICROMETERS) MINIMUM THICK TIN LEAD IN SOLDER AREA. 15 MICRONS (0.38 MICROMETERS) MINIMUM GOLD IN LOCALIZED PLATE AREA. ENTIRE CONTACTS PLATED WITH 50 MICRONS (1.27 MICROMETERS) MINIMUM THICK NICKEL. SHIELDED: 0.0098 INCHES (0.25 MILLIMETERS) THICK COPPER ZINC ALLOY PLATED WITH 30 MICRONS (0.762 MICROMETERS) MINIMUM THICK NICKEL.
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F
- PART NUMBER: XRJD-S-24-0-0-X

NOTES: UNLESS OTHERWISE SPECIFIED
UNSPECIFIED TOLERANCE: J1 ± 0.010 [0.25]
X ± 0.008 [0.19]

REFER TO LED OPTIONS TABLE FOR ORDERING CODES

XMULTIPLE		CONNECTING THE INFORMATION AGE	
<small> XMULTIPLE AREA 11F-1, No. 70, Fu-Hsing N. Road Taipei, Taiwan, R.O.C. </small>		<small> XMULTIPLE USA 2448 Country Club Drive #B-100 Simi Valley, CA 90886 </small>	
THIS DRAWING IS A CONTROLLED DOCUMENT.			
TITLE: Stacked RJ45, Connectors, w/LED, BP, BC, Shielded, Thru Hole, Bottom Piece		DWG NO: PDS24-JRD21	
PART NO: XRJD-S-04-8-8-X		DWG: VIQ	
DIMENSIONS [mm] inch		SHEET 1 of 1	
		REV J1	
		DATE 09/10/02	
		CWR: E. KOLLAR	