



LED SCHEMATIC



BI-COLOR LED DETAIL
(RED, RED/YELLOW, GREEN/ORANGE LED'S ARE ALSO AVAILABLE)

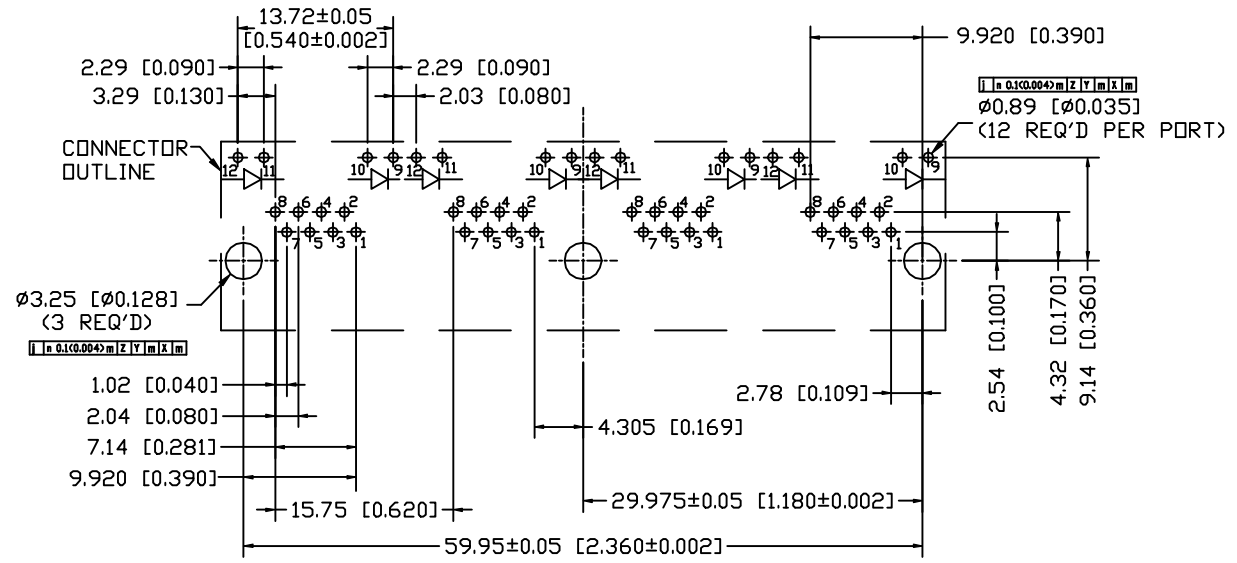

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

PCB LAYOUT
TOLERANCE
.XX±0.05[0.002]

1. MATERIALS:
HOUSING: HIGH TEMP. THERMOPLASTIC, BLACK, UL 94V-0
CONTACTS: 0.014 INCHES (0.35 MILLIMETERS) THICK PHOSPHOR BRONZE PLATED WITH 150 MICROINCHES(3.81 MICROMETERS) MINIMUM THICK TIN LEAD IN SOLDER AREA. 15 MICROINCHES (0.38 MICROMETERS) MINIMUM GOLD IN LOCALIZED PLATE AREA. ENTIRE CONTACTS PLATED WITH 50 MICROINCHES (1.27 MICROMETERS) MINIMUM THICK NICKEL.
2. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F
3. PART NUMBER: XRJ-U-04-8-8-X-F2

NOTES: UNLESS OTHERWISE SPECIFIED
UNSPECIFIED TOLERANCE: .XX±0.25[0.010]
.X±0.30[0.012]

REFER TO LED OPTIONS TABLE FOR ORDERING CODES

XMULTIPLE		CONNECTING THE INFORMATION AGE	
XMULTIPLE ASIA 27, No. 60, Juihua St., Tainpei, 104, Taiwan, R.O.C.	XMULTIPLE USA 3045 Old County Road, Newbury Park, CA 91380	DWG:	PDU04-802
THIS DRAWING IS A CONTROLLED DOCUMENT.		DRAWN:	VIQ
TITLE: RJ45, Connectors, W/LED,SP,BC, Unshielded, Thru-Hole	PART NO: XRJM-U-04-8-8-X-F2	ORG:	C. TSAI
DIMENSIONS mm[Inch]	SHEET 1 of 1	REV J	DATE 10/06/01