


SPECIFICATION FOR APPROVAL

Customer:
 Customer P/N:
 Meisongbei P/N: MW322522-4R7M
 Date: 2011-3-31




A Dimensions: Unit(mm)

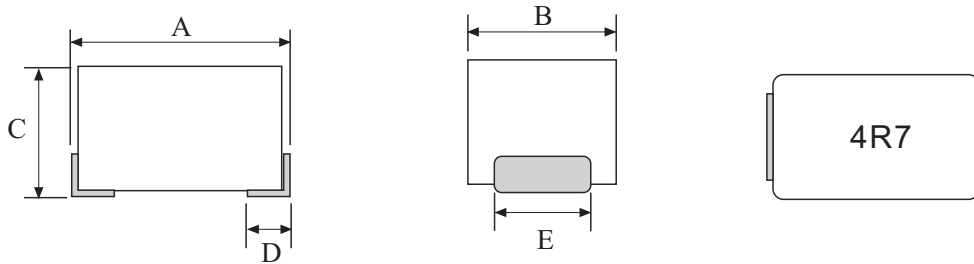


Part NO	A	B	C	D	E
MW322522-4R7M	3.2 ± 0.2	2.5 ± 0.2	2.2 ± 0.2	0.5	1.2 ± 0.2

B Soldering: Unit(mm)

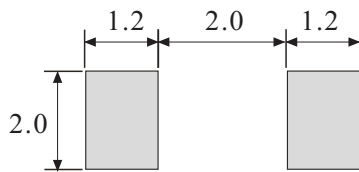

C Schematic:



D Electrical Character

Part Number	Inductance	DCR	IDC	Test Conditions
	L(μH)	Ω	mA	
MW322522-4R7M	4.7±20%	1.5 max	220 max	7.96MHz

E Test equipment:

1. L: HP4291 Tested at 7.96MHz
2. DCR: AX-111
3. Electrical specifications at: 20°C

F General Specifications:

1. Storage temp range: -40°C to +125°C
2. Operating temp range: -40°C to +85°C

Approved By	Poal	Checked By	Alan
-------------	------	------------	------