


1. MECHANICAL DIMENSIONS (外形尺寸): DRAW NO.: SMTDRRI127P-4P-4R

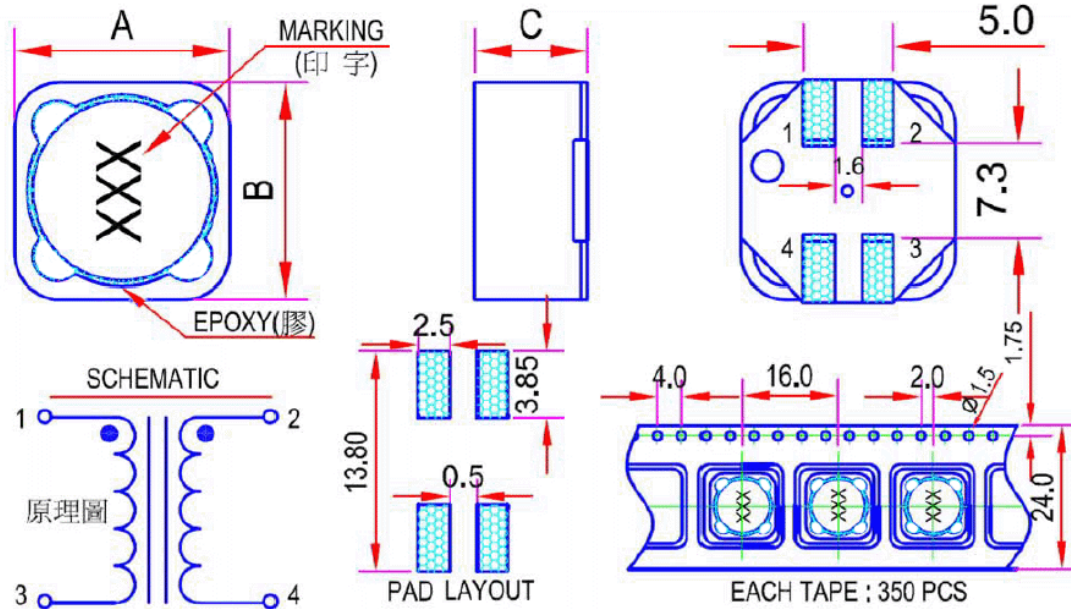

Item項目	Spec.(規格mm)	Typ.(參考值)	Item項目	Spec.(規格mm)	Typ.(參考值)
A	12.5 MAX	12.13	F		
B	12.5 MAX	12.17	G		
C	8.5 MAX	7.61	H		
D			I		
E			J		

2. NOTES (備注, 包括印字及起始同相端等特別要求):

2.1 Marking (印字): "100"

CUSTOMER APPROVED (客戶確認)	APPROVED(確認)	CHECKED(檢查)	DRAWN(制圖)

XTIZ0 Xmultiple Technologies, Inc,	PAGE: OF
------------------------------------	----------

P/N : SMTDRRI127P-100M-4P	YOUR REF.:
---------------------------	------------

3. ELECTRICAL CHARACTERISTICS (電特性要求) :

Item (項目)	Specifications (規格)	Typ.(參考值)	Test equipments (測試設備) :
L1-3=L2-4	10.0uH ± 20%	10.81uH	HP4284A PRECISION LCR METER
L Load	L+7.0A L drop25% MAX	10.46uH	HP4284A WITH HP42841A CURRENT SOURCE
Test Freq.	@100kHz 0.25V		
DCR1=DCR2	44mOHM MAX	39.5mOHM	CHENHWA 502 OHM METER
I sat.	7.0A MAX		HP4284A WITH HP42841A CURRENT SOURCE
Turns	12.5TsX2 REF(雙線並繞)		
Ope.Temp.	-40 TO 125°C		HC-D3M TEMP. & HUMIDITY CHAMBER
Stor.Temp.	-40 TO 125°C		HC-D3M TEMP. & HUMIDITY CHAMBER

ELECTRICAL NOTES (電特性備注欄) :

APPROVED(確認)	CHECKED(檢查)	DRAWN(制圖)
		