


3L P/N : SMTTC50-601U:601U-3.6A

YOUR REF.:

1.MECHANICAL DIMENSIONS (外形尺寸): DRAW NO.: SMTTC50-XTX2

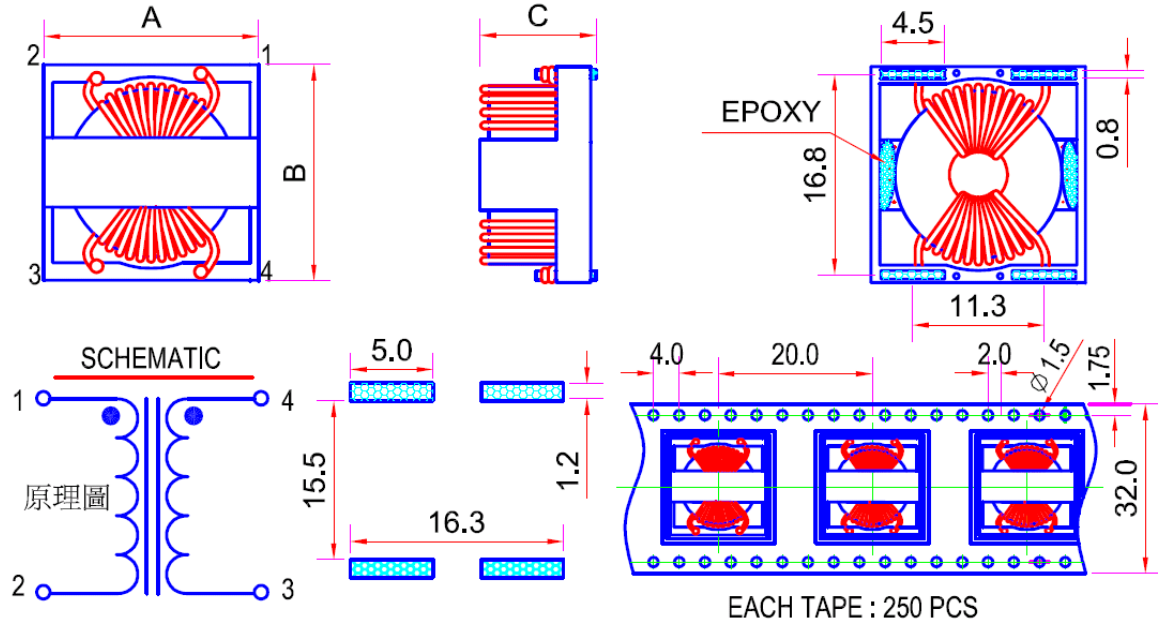

Item項目	Spec.(規格mm)	Typ.(參考值)	Item項目	Spec.(規格mm)	Typ.(參考值)
A	17.8 MAX	17.56	F		
B	19.8 MAX	19.06	G		
C	9.8 MAX	9.51	H		
D			I		
E			J		

2. NOTES (備注, 包括印字及起始同相端等特別要求):

2.1 Marking (印字): ""

CUSTOMER APPROVED (客戶確認)	APPROVED(確認)	CHECKED(檢查)	DRAWN(制圖)

3L P/N : SMTTC50-601U:601U-3.6A

YOUR REF.:

3. ELECTRICAL CHARACTERISTICS (電特性要求) :

Item (項目)	Specifications (規格)	Typ.(參考值)	Test equipments (測試設備) :
L1=L2	0.6mH MIN	0.86mH	HP4284A PRECISION LCR METER
Test Freq.	@100kHz 0.10V		HP4284A PRECISION LCR METER
DCR1=DCR2	50mOHM MAX	19.4mOHM	CHENHWA 502 OHM METER
SRF	4 MHz Ref.	3.22MHz	AGILENT E4991A RF IMPEDANCE ANALYZER
R.Current	3.6A MAX		HP4284A WITH HP42841A CURRENT SOURCE
Turns	13Ts:13Ts Ref.		
Ope.Temp.	-30°C TO +105°C		HC-D3M TEMP. & HUMIDITY CHAMBER

ELECTRICAL NOTES (電特性備注欄) :

APPROVED(確認)	CHECKED(檢查)	DRAWN(制圖)
		