


RECOMMENDED
PANEL CUTOUT DIMENSION

NOTES:

- MATERIALS:
HOUSING: PBT POLYESTER, UL 94V-0 MIXED GLASS FIBER, STANDARD COLOR-BLACK
CONTACTS: T=0.35 mm THICK PHOS-BRONZE PLATED WITH 15u" GOLD AND GOLD FLASH IN SOLDER AREA.
- OPERATING TEMPERATURE: -40°C ~ +85°C
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F
- UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

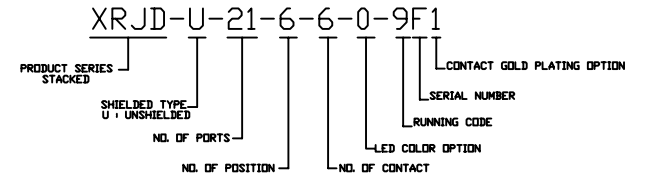

RoHS Compliant

SUGGESTED PCB LAYOUT
TOP VIEW
DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]

X MULTIPLE		THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu, Taipei, Taiwan 11475		XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT. TITLE: Stacked RJ11 Connectors, W/o LED, 6P,6C, Unshielded, Thru Hole		G/NO: 9733 DWG NO: XRJD-U-21-6-6-0-9F1 DRAWN: RUNES	
PART NO: XRJD-U-21-6-6-0-9F1		CHKD: JEFF DATE: Feb.16,07	
	UNIT mm[inch]	SHEET 1 of 1	REV 01