RoHS Compliance

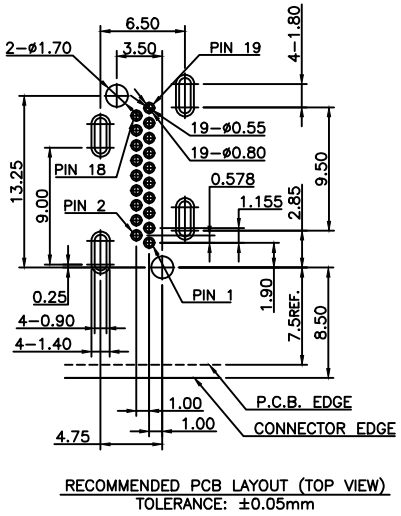

RECOMMENDED PCB LAYOUT (TOP VIEW)
TOLERANCE: ±0.05mm

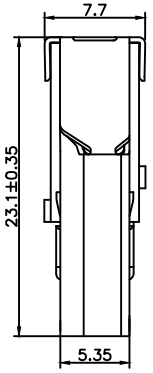

NOTE:

1. Material:
   - 1-1. Terminals: Brass C2680, T=0.2±0.02mm.
   - 1-2. Shell: Brass Alloy.
   - 1-3. Housing: LCP+30% G.F., UL94-0, Black.
2. Plating:
   - 2-1. Terminals: G/F Plated On Contact Area, 100u" Tin Plated On Solder Tail Area, 50u" Min. Nickel Under Plated Overall.
   - 2-2. Shell: 100u" Min. Nickel Plated Overall.
3. Specifications:
   - 3-1. Current Rating: 0.5A
   - 3-2. Contact Resistance: 30mΩ Max.
   - 3-3. Dielectric Withstanding Voltage: 500V AC / Per Minute.
   - 3-4. Insulation Resistance: 100MΩ Min., DC 500V.
   - 3-5. Operating Temperature: -40°C ~ +105°C.
   - 3-6. All Parts Meet RoHS Compliant.

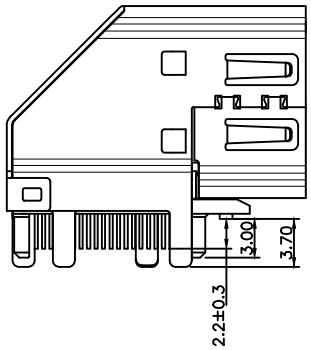

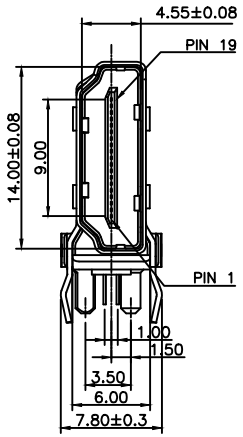

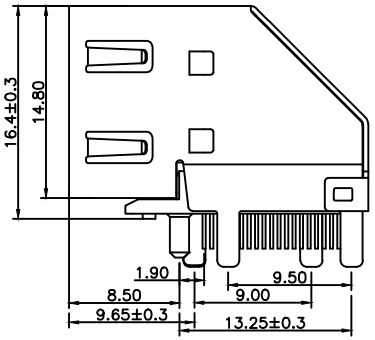

LTR	DESCRIPTION	DATE	APVD
△	–	–	–

REVISIONS

THIS DRAWING IS A CONTROLLED DOCUMENT.
DO NOT SCALE DRAWING.

DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:
THIRD ANGLE PROJECTION	X ± 0.3 X.X ± 0.2 X.XX ± 0.1 X.XXX ± 0.05 ANGLES ± 5.0°
MATERIAL SEE NOTES	FINISH SEE NOTES
DWN T. LI	DATE OCT-17-2019
CHK D. Wang	OCT-17-2019
APVD R. Tsai	OCT-17-2019

XMULTIPLE

TITLE: HDMI AF, Side/Stand, Dip Type.

SIZE A3 | DRAWING NO XHDMI-AFS19P01-C1

WEIGHT – GRAMS Ref. | REV A | SHEET 1 / 1