



RoHS Compliance

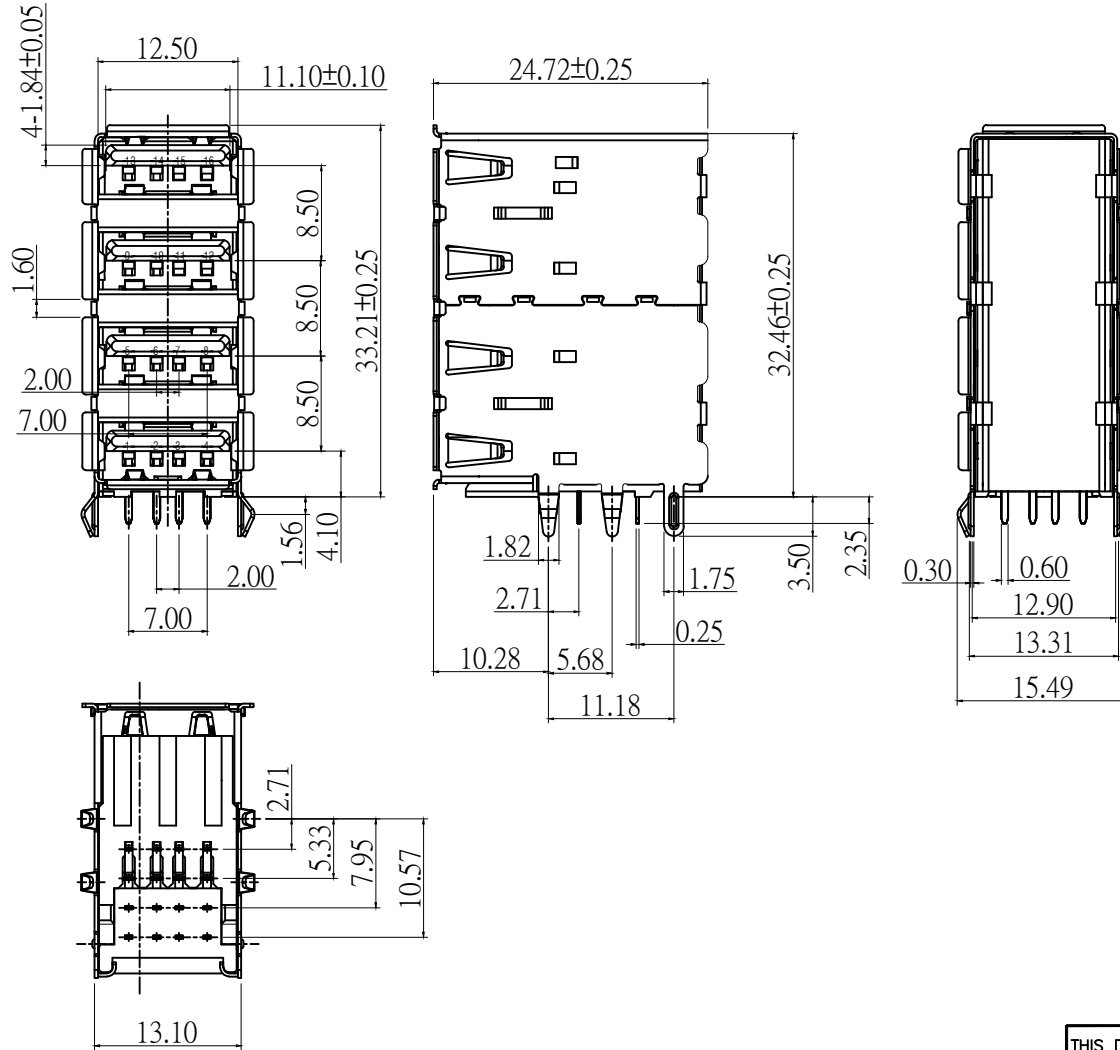

- Material :
 - Housing : PBT+30% G.F., UL94V-O. Black.
 - Bottom Cover : PBT+30% G.F., UL94V-O. Black.
 - Contacts : Copper Alloy, Nickel Under Plated All Over, Plating : G/F(Contact)+Tin Plating(Solder Tail)
 - Spring Clip : SK7, Nickel Plating Over Copper Plated.
 - Shell : SUS403, 80u" Min. Tin Plating Over Nickel Plated.
- Mechanical :
 - Insertion Force : 35N Max..
 - Withdrawal Force : 10N Min..
 - Durability : 1,500 Cycles Min..
- Electrical :
 - Current Rating : 1.5A Max..
 - Voltage Rating : 30V Max..
 - Withstanding Voltage : 750V AC.
 - Contact Resistance : 30m Ohms Max..
 - Insulation Resistance : 1,000M Ohms Min..
- Temperature Range : -40°C ~ 85°C.
- All Parts Meet RoHS Compliant.

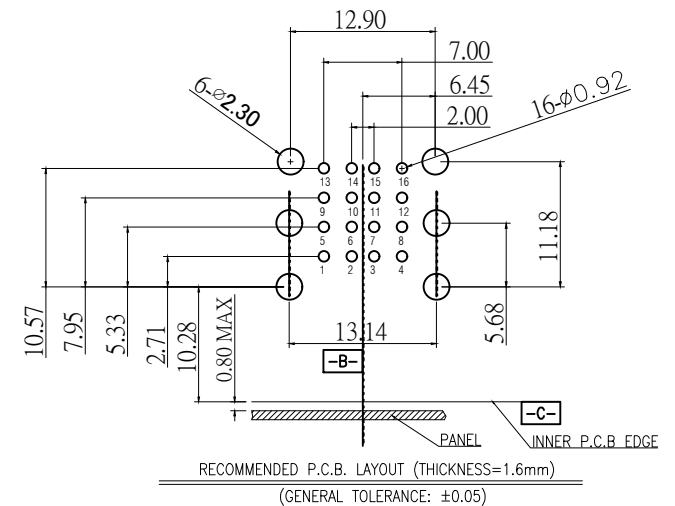

THIS DRAWING IS A CONTROLLED DOCUMENT. DO NOT SCALE DRAWING.	
DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	X ± 0.3 X.X ± 0.2 X.XX ± 0.1 X.XXX ± 0.05 ANGLES ± -
THIRD ANGLE PROJECTION	
MATERIAL SEE NOTES	FINISH SEE NOTES
DWN T. LI	DATE OCT-29-2018
CHK D. Wang	OCT-29-2018
APVD R. Tsai	OCT-30-2018



TITLE		USB 2.0 AF, 1*4 Ports, R/A, Dip Type.	
SIZE	DRAWING NO	XUSB-20AFRDGD41-R	
A3		WEIGHT	- GRAMS Ref.
		REV	A
		SHEET	1

REVISIONS	DESCRIPTION	DATE	APVD
△ -		-	-