RoHS Compliance

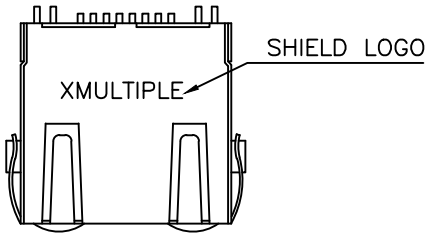

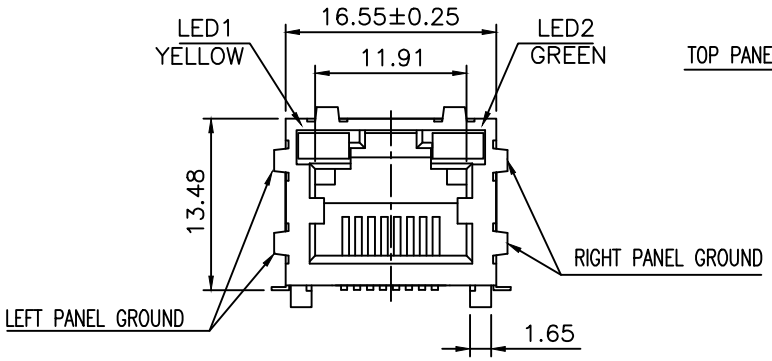

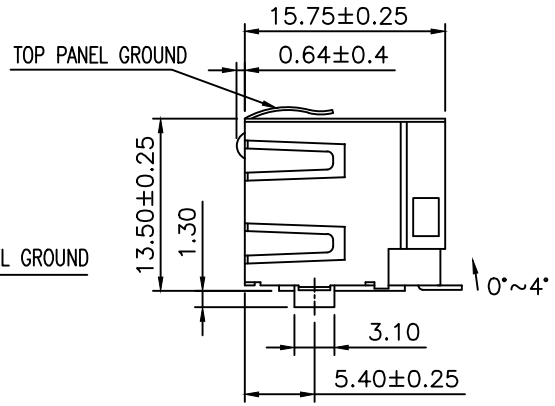

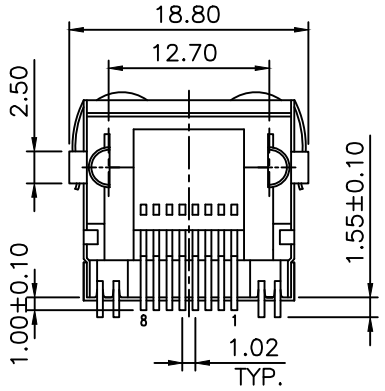

MATERIAL:

- HOUSING–PA9T GN2330
  HEAT RESISTANT PLOYAMIDE RESIN
  BLACK COLOR, UL94V–0
- INSERT HOUSING–DSM STANYL TE250F6 (NYLON–46)
  HEAT DEFLCTION TEMP.290°
  BLACK COLOR, UL94V–0.
- CONTACTS–0.35mm THICK PHOS–BRONZE PLATED
  WITH HARD GOLD AND GOLD FLASH ON
  SOLDER AREA.
- SHIELD–0.25mm TIHCK COPPER ALLOY,
  PLATED WITH NICKEL.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

OPERATING TEMPERATURE –40°C TO 85°C
WAVE SOLDER CAPABLE TO 265°C.
REFLOW SOLDER CAPABLE TO 260°C.

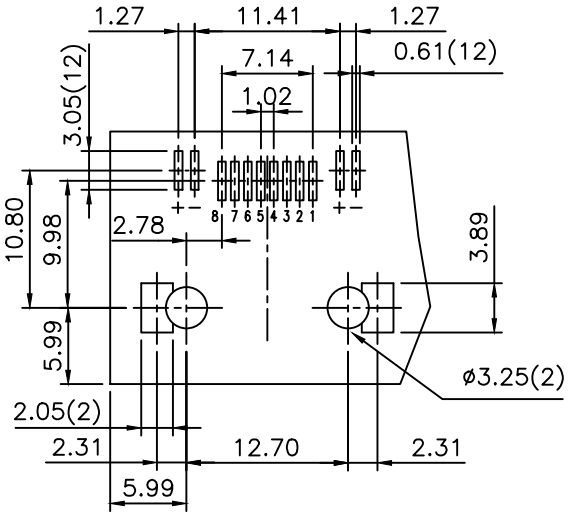

PCB LAYOUT
Ref.

LTR	DESCRIPTION	DATE	APVD
△	–	–	–

REVISIONS

THIS DRAWING IS A CONTROLLED DOCUMENT.
DO NOT SCALE DRAWING.

DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:
THIRD ANGLE PROJECTION	X ± – X.X ± 0.25 X.XX ± 0.20 X.XXX ± 0.10 ANGLES ± –
MATERIAL SEE NOTES	FINISH SEE NOTES

DWN	T. LI	DATE OCT–01–2021
CHK	D. Wang	OCT–01–2021
APVD	R. Tsai	OCT–04–2021

XMULTIPLE
www.xmultiple.com

TITLE
MODULAR JACK, RJ45, WITH LED'S
SHIELDED, SMT TYPE, SIDE ENTRY

SIZE	DRAWING NO	REV	SHEET
A3	XMS–9756–8814–S3L2–B–LFG	1	1

WEIGHT – GRAMS Ref.