


- NOTES:
- THIS CONNECTOR IS TNC PLUG FOR RG-58/U.
 - ITEMS ⑥ ⑦ ARE SHIPPED UNASSEMBLED.
 - ELECTRICAL SPEC:
 - IMPEDANCE: 50 OHMS NOMINAL.
 - FREQUENCY RANGE: 0~6 GHz.
 - INSULATOR RESISTANCE: 1000 MEGOHMS MIN.
 - WITHSTANDING VOLTAGE: 1000 VRMS.
 - CONTACT RESISTANCE:
 - CENTER CONTACT: 1.5 MILLIOHMS MAX.
 - OUTER CONTACT: 1.0 MILLIOHMS MAX.
 - MECHANICAL SPEC:
 - MATING: 7/16-28UNEF THREAD.
 - DURABILITY: 500 CYCLES MIN.
 - UNSPECIFIED TOLERANCE: .XX ±0.25[0.001]
.X ±0.30[0.011]

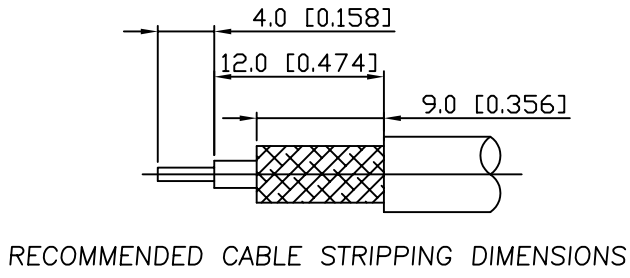

RoHS Compliant

7	FERRULE	BRASS	NICKEL	1
6	PIN CONTACT	BRASS	GOLD 0.08um MIN OVER NICKEL	1
5	MAIN BODY	BRASS	NICKEL	1
4	RING	PHOSPHOR BRONZE	NONE	1
3	GASKET	SILICONE RUBBER	NONE	1
2	INSULATOR	PTFE	NONE	1
1	NUT	BRASS	NICKEL	1
ITEM	NAME	SPEC.	FINISH	Q'TY

		THE INFORMATION AGE	
		X MULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu, Taipei, Taiwan 11475	
X MULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065		G/NO:	
THIS DRAWING IS A CONTROLLED DOCUMENT.			
TITLE:		TNC PLUG	
PART NO:		XRF-T1-1R3-CDA-K01	
		UNIT	SHEET
mm[inch]		1 of 1	01
REV		DATE:	
		JEFF	
		Jan.24,08	